


Iron Construction

Performance Curves (Metric) HD 330

Model ID330 DI



127 x 101.6 mm Std. Port Size

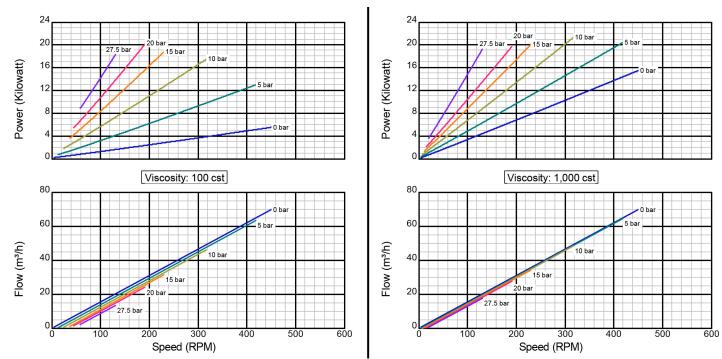


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Model ID330 DI

Iron Construction

Standard Clearance

127 x 101.6 mm Std. Port Size

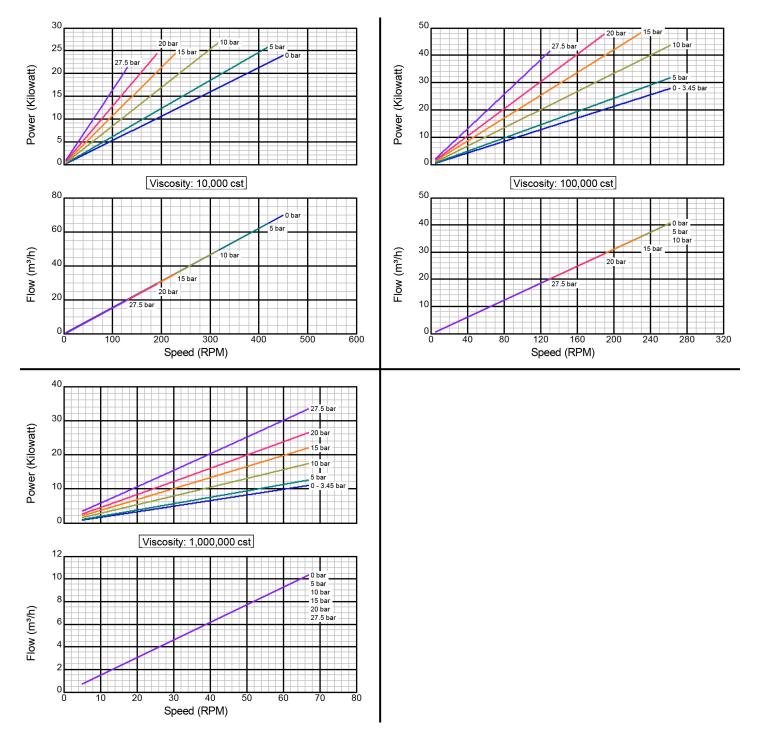


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Model ID330 DI

Standard Clearance

Iron Construction

127 x 101.6 mm Std. Port Size

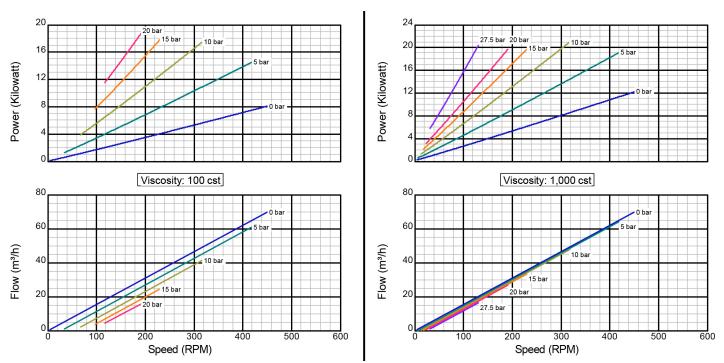


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Model ID330 DI

Iron Construction

Standard Clearance

127 x 101.6 mm Std. Port Size

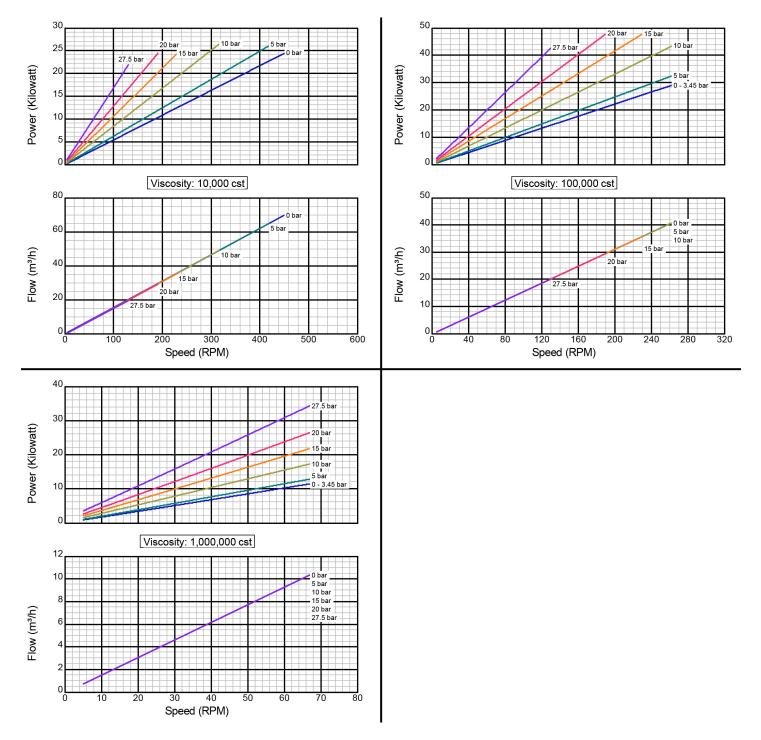


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Stainless Steele Construction

Standard Clearance

127 x 101.6 mm Std. Port Size

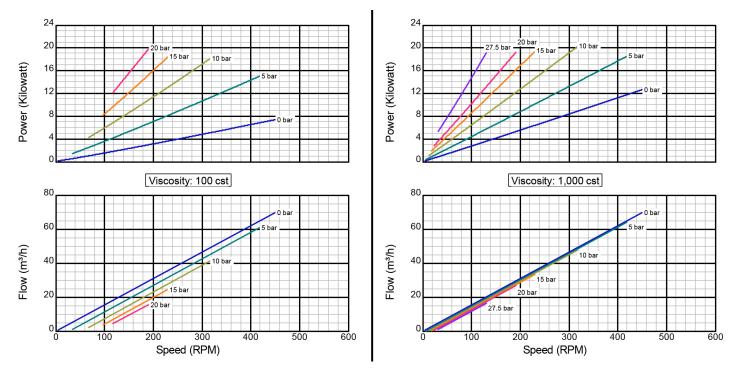


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Stainless Steele Construction

Standard Clearance

127 x 101.6 mm Std. Port Size

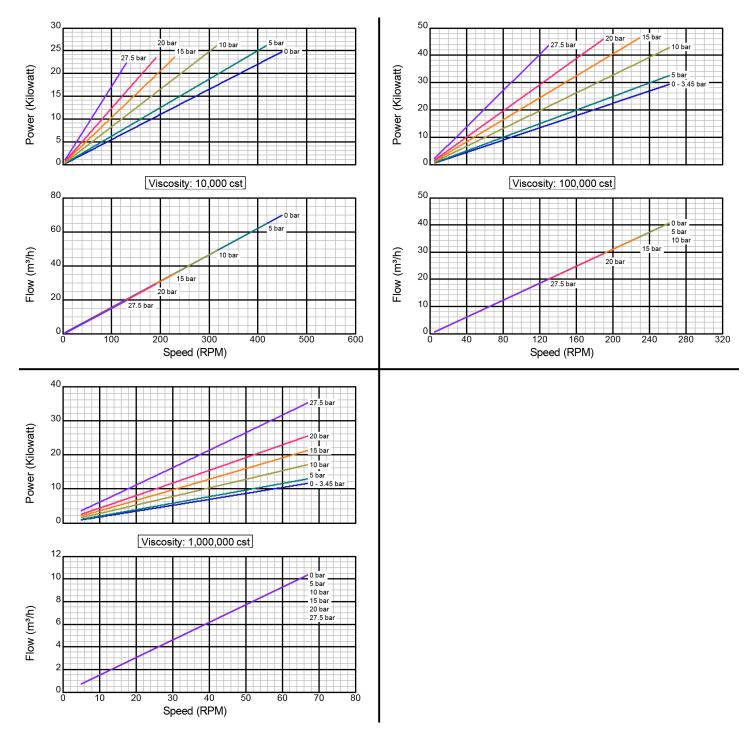


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Standard Clearance

Stainless Steele Construction

127 x 101.6 mm Std. Port Size

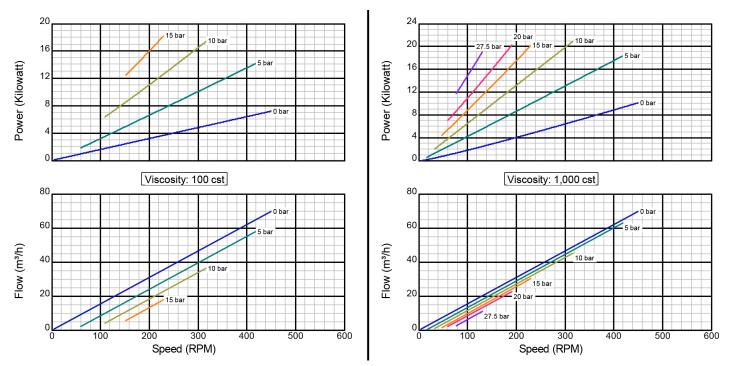


There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Stainless Steel Construction

Hot Clearance

127 x 101.6 mm Std. Port Size

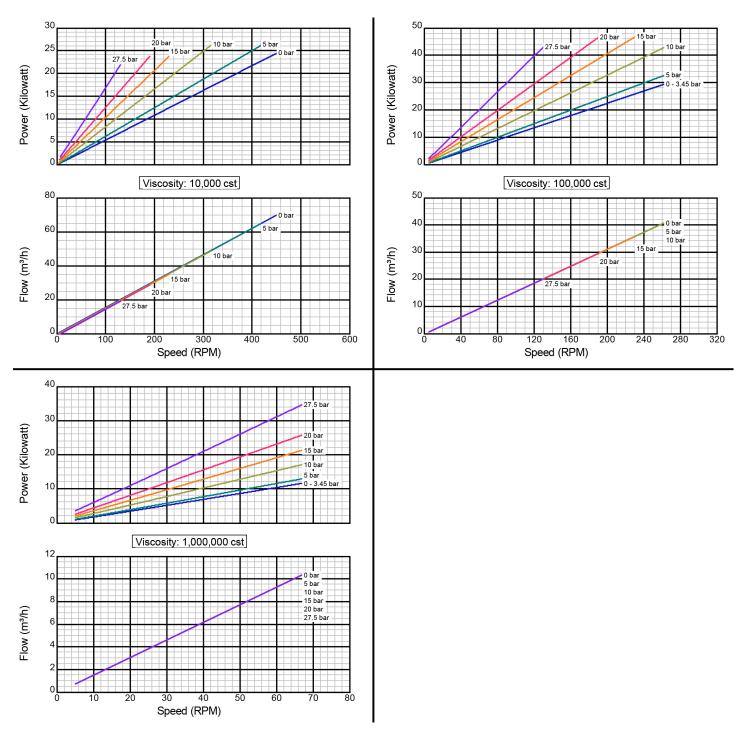

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatabilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on November 30, 2000

Excellence at work. Excellence in life.