


Model ID600 DI



Iron Construction

Standard Clearance


152.4 mm Std. Port Size

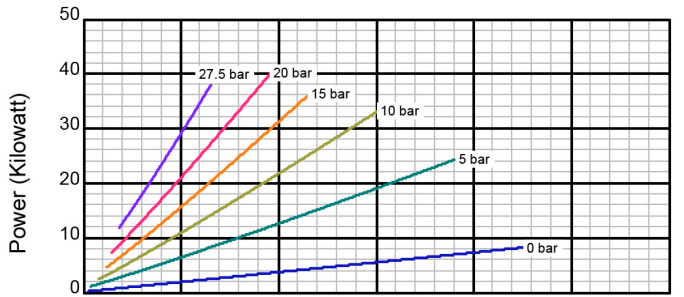

Viscosity: 100 cst

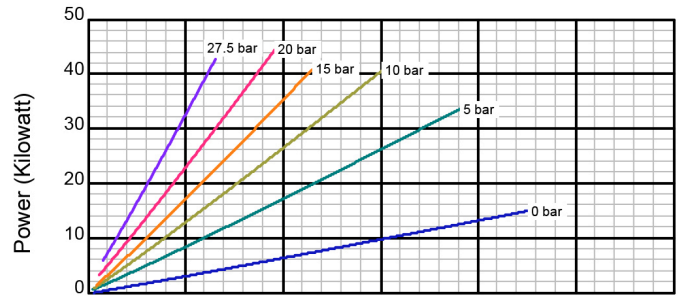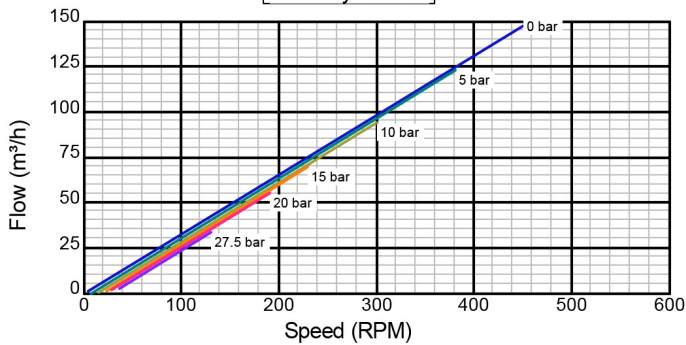

Viscosity: 1,000 cst

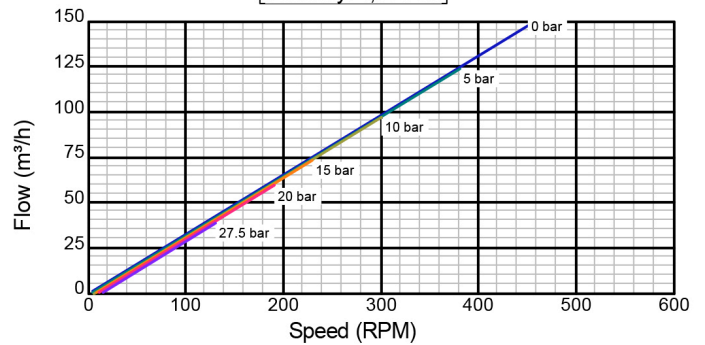

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model ID600 DI



Iron Construction

Standard Clearance



152.4 mm Std. Port Size

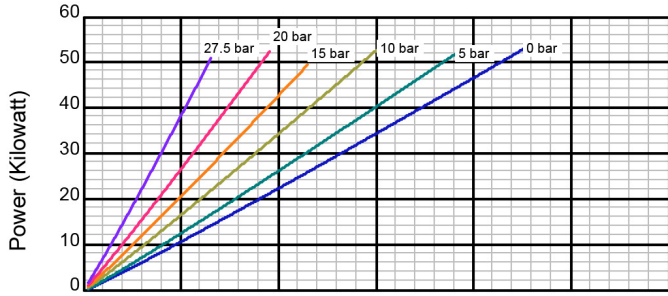


Viscosity: 10,000 cst

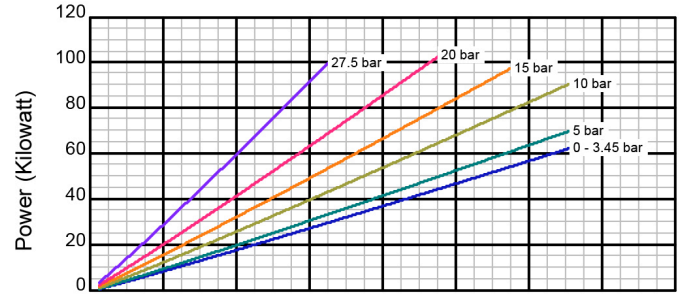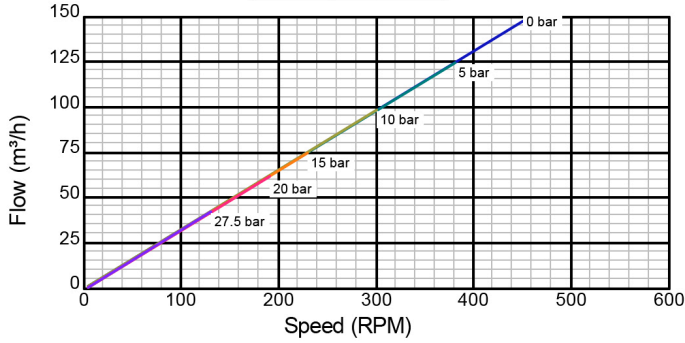

Viscosity: 100,000 cst

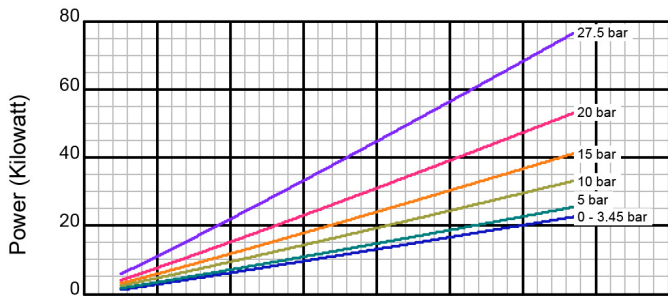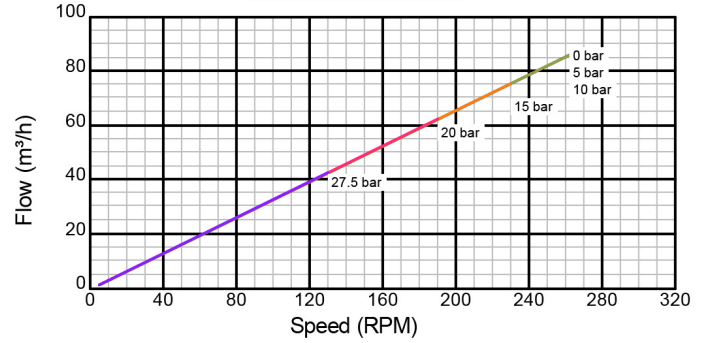

Viscosity: 1,000,000 cst

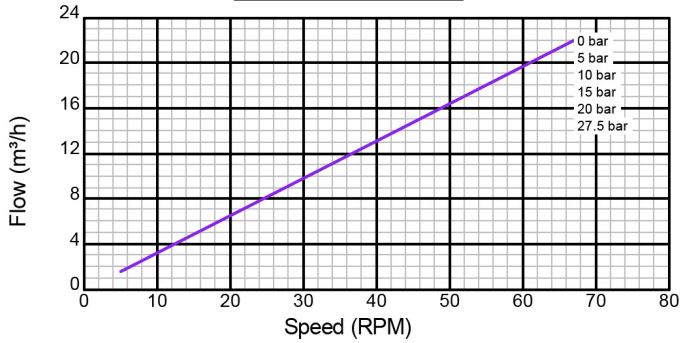

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model ID600 DI



Iron Construction

Hot Clearance


152.4 mm Std. Port Size

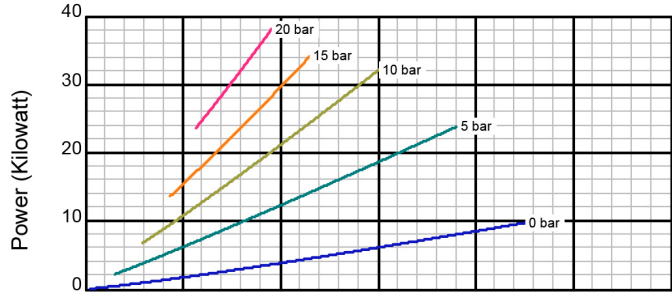

Viscosity: 100 cst

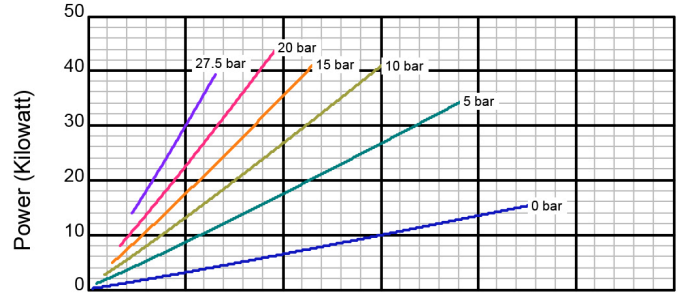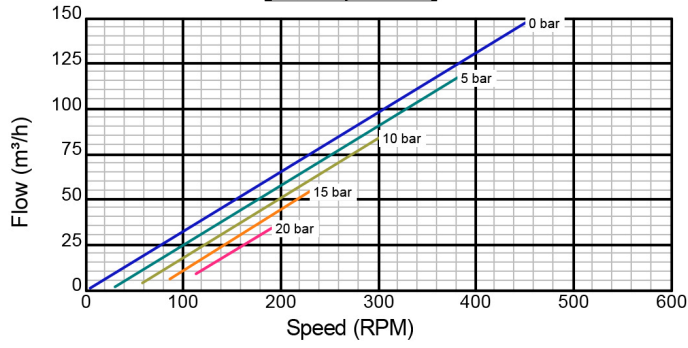

Viscosity: 1,000 cst

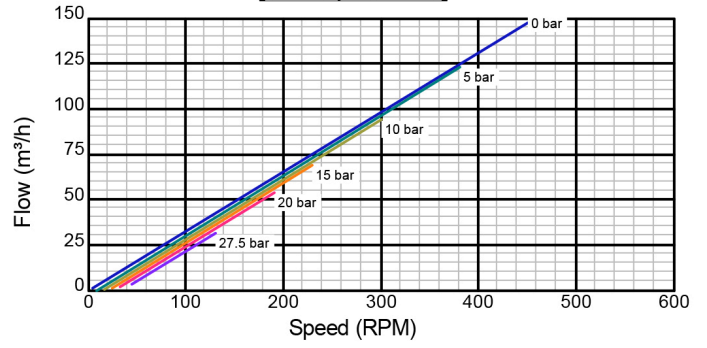

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model ID600 DI



Iron Construction

Hot Clearance



152.4 mm Std. Port Size

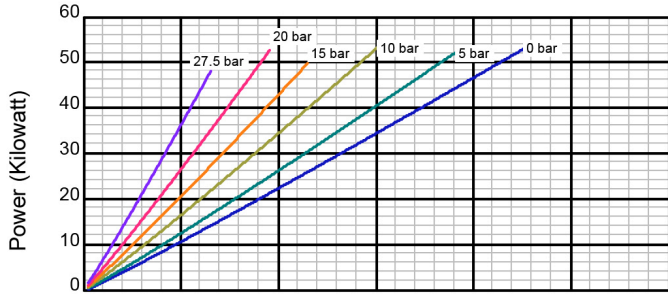


Viscosity: 10,000 cst

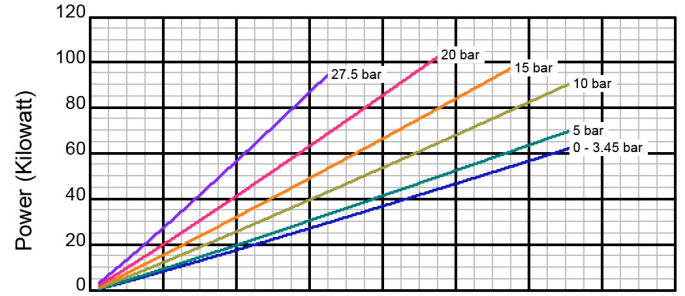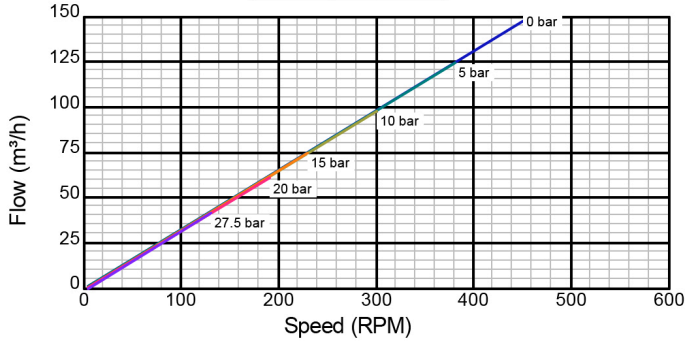

Viscosity: 100,000 cst

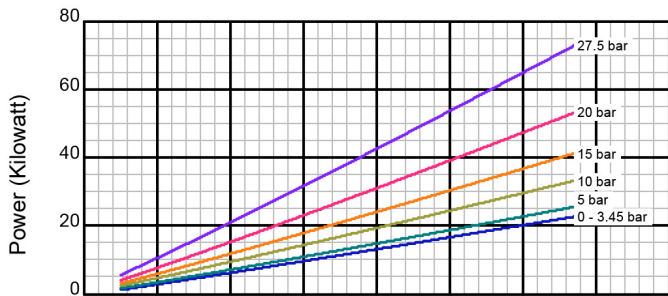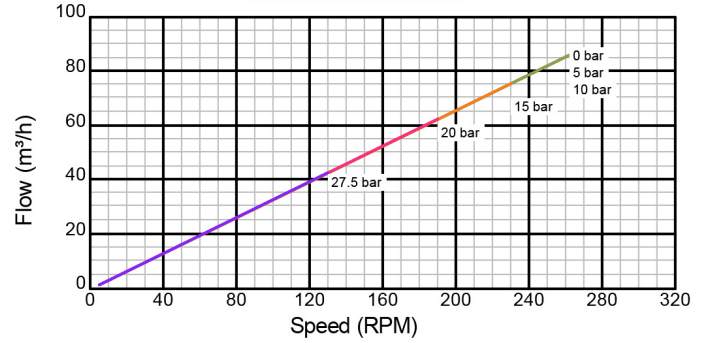

Viscosity: 1,000,000 cst

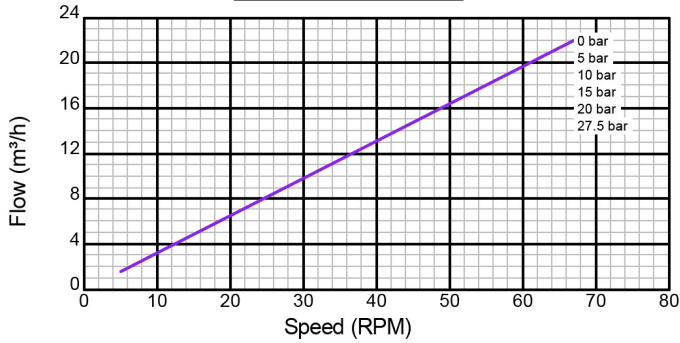

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model ID600 SS



Stainless Steel Construction

Standard Clearance


152.4 mm Std. Port Size

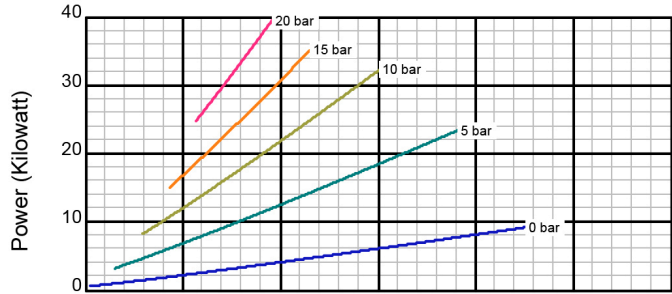

Viscosity: 100 cst

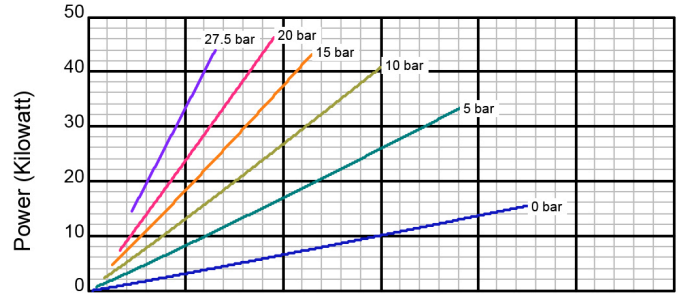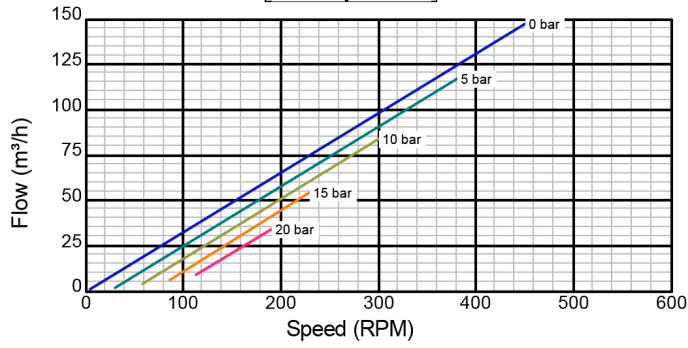

Viscosity: 1,000 cst

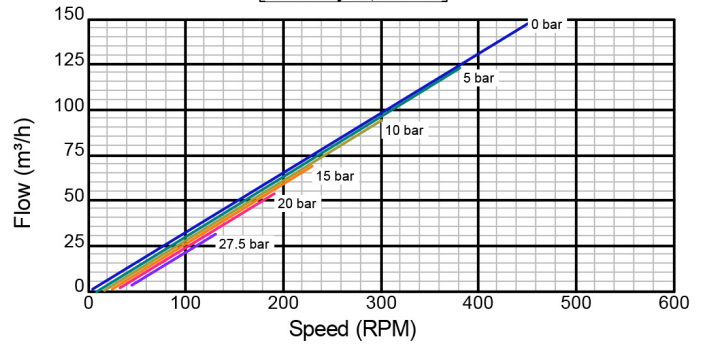

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model ID600 SS



Stainless Steel Construction

Standard Clearance



152.4 mm Std. Port Size

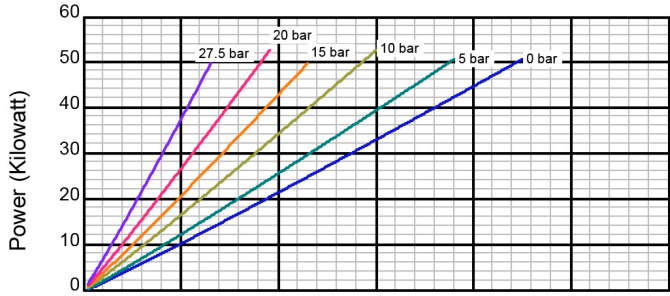


Viscosity: 10,000 cst

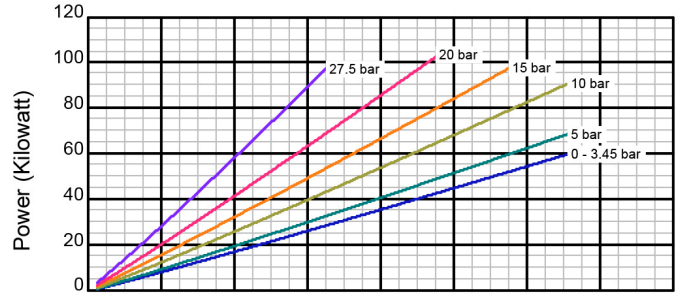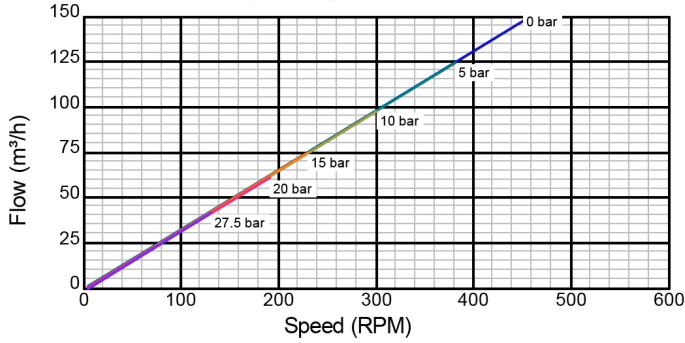

Viscosity: 100,000 cst

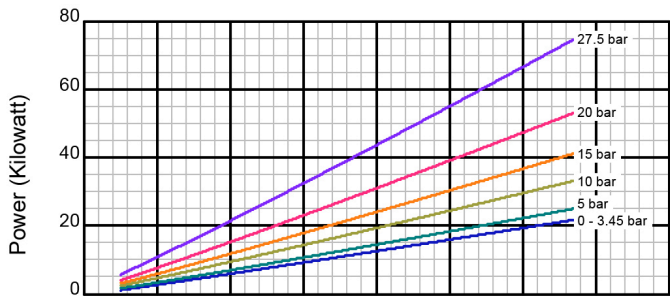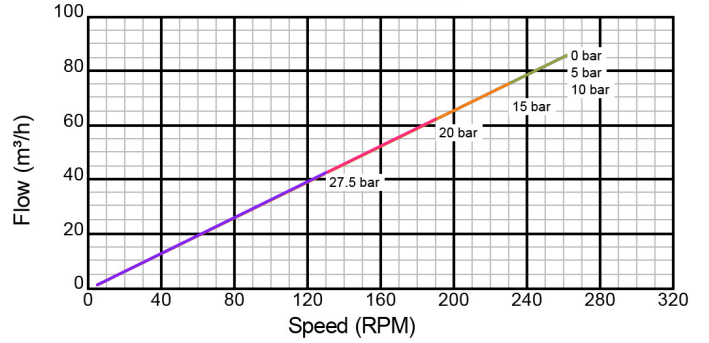

Viscosity: 1,000,000 cst

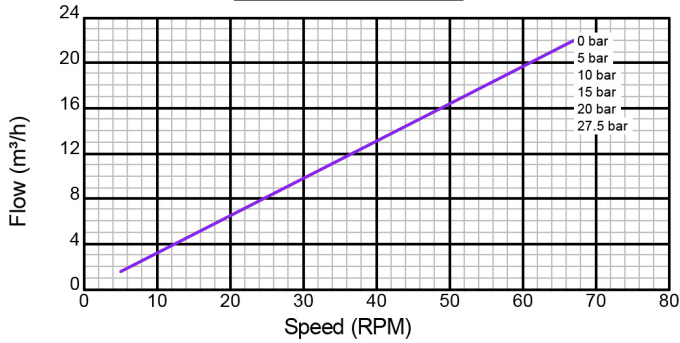

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model ID600 SS



Stainless Steel Construction

Hot Clearance


152.4 mm Std. Port Size

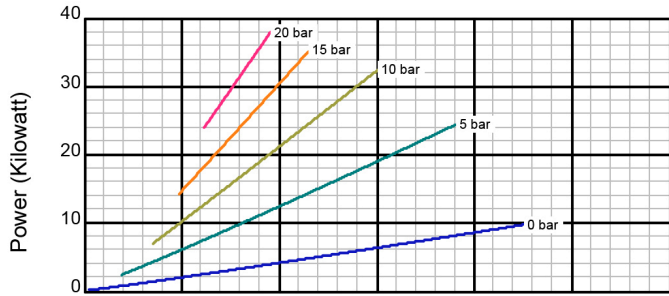

Viscosity: 100 cst

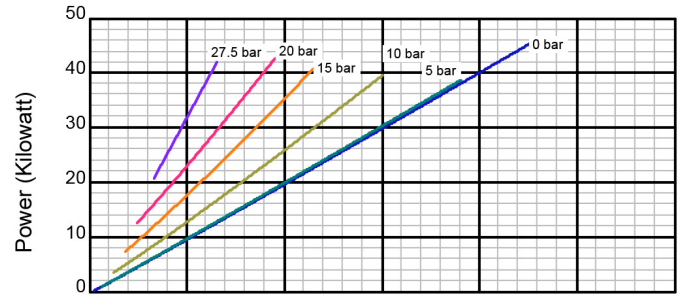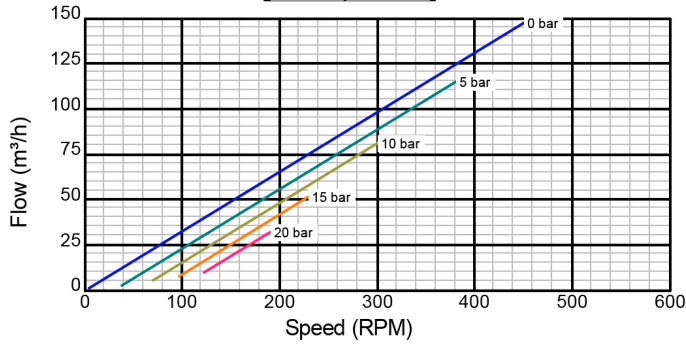

Viscosity: 1,000 cst

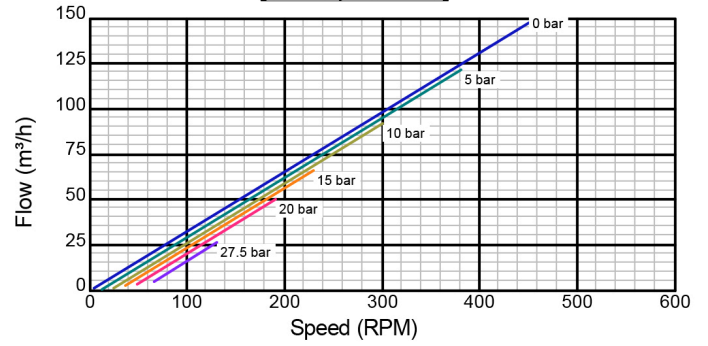

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model ID600 SS



Stainless Steel Construction

Hot Clearance



152.4 mm Std. Port Size

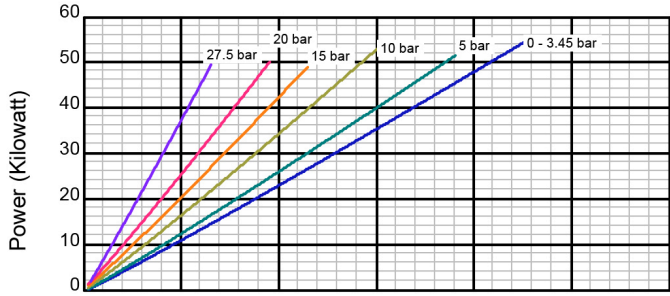


Viscosity: 10,000 cst

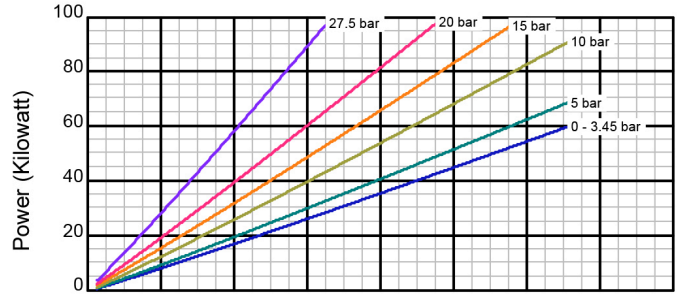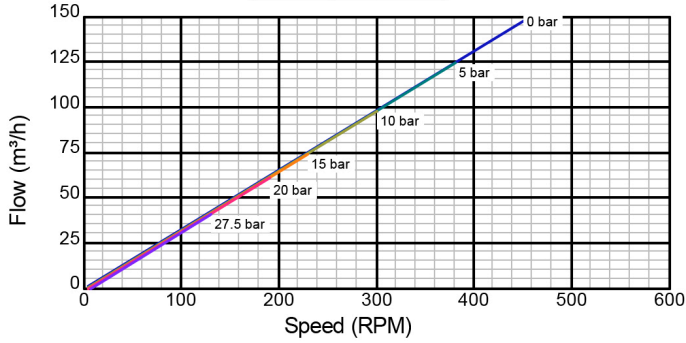

Viscosity: 100,000 cst

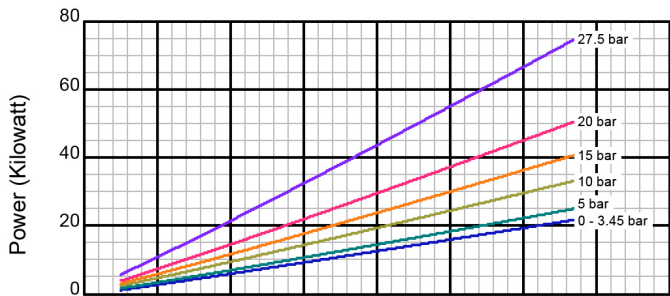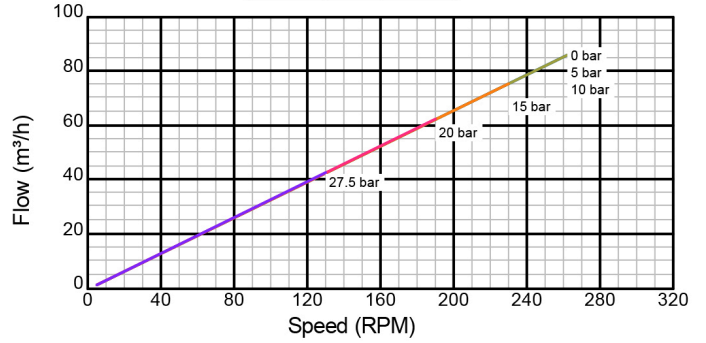

Viscosity: 1,000,000 cst

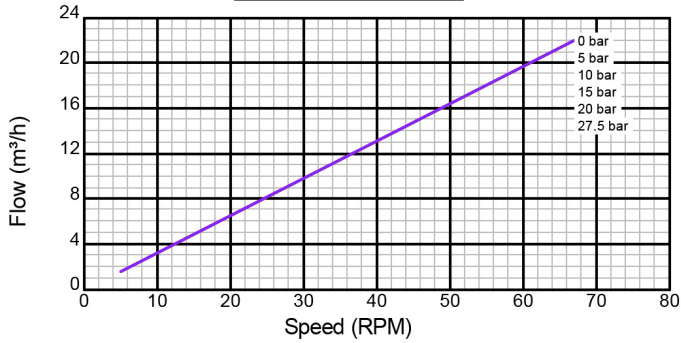

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on November 30, 2000

Tuthill Pump Group

12500 S. Pulaski Road, Alsip, IL 60803

www.tuthillpump.com

Excellence at work. Excellence in life.