


Capacity / WHP / VHP / NIPR

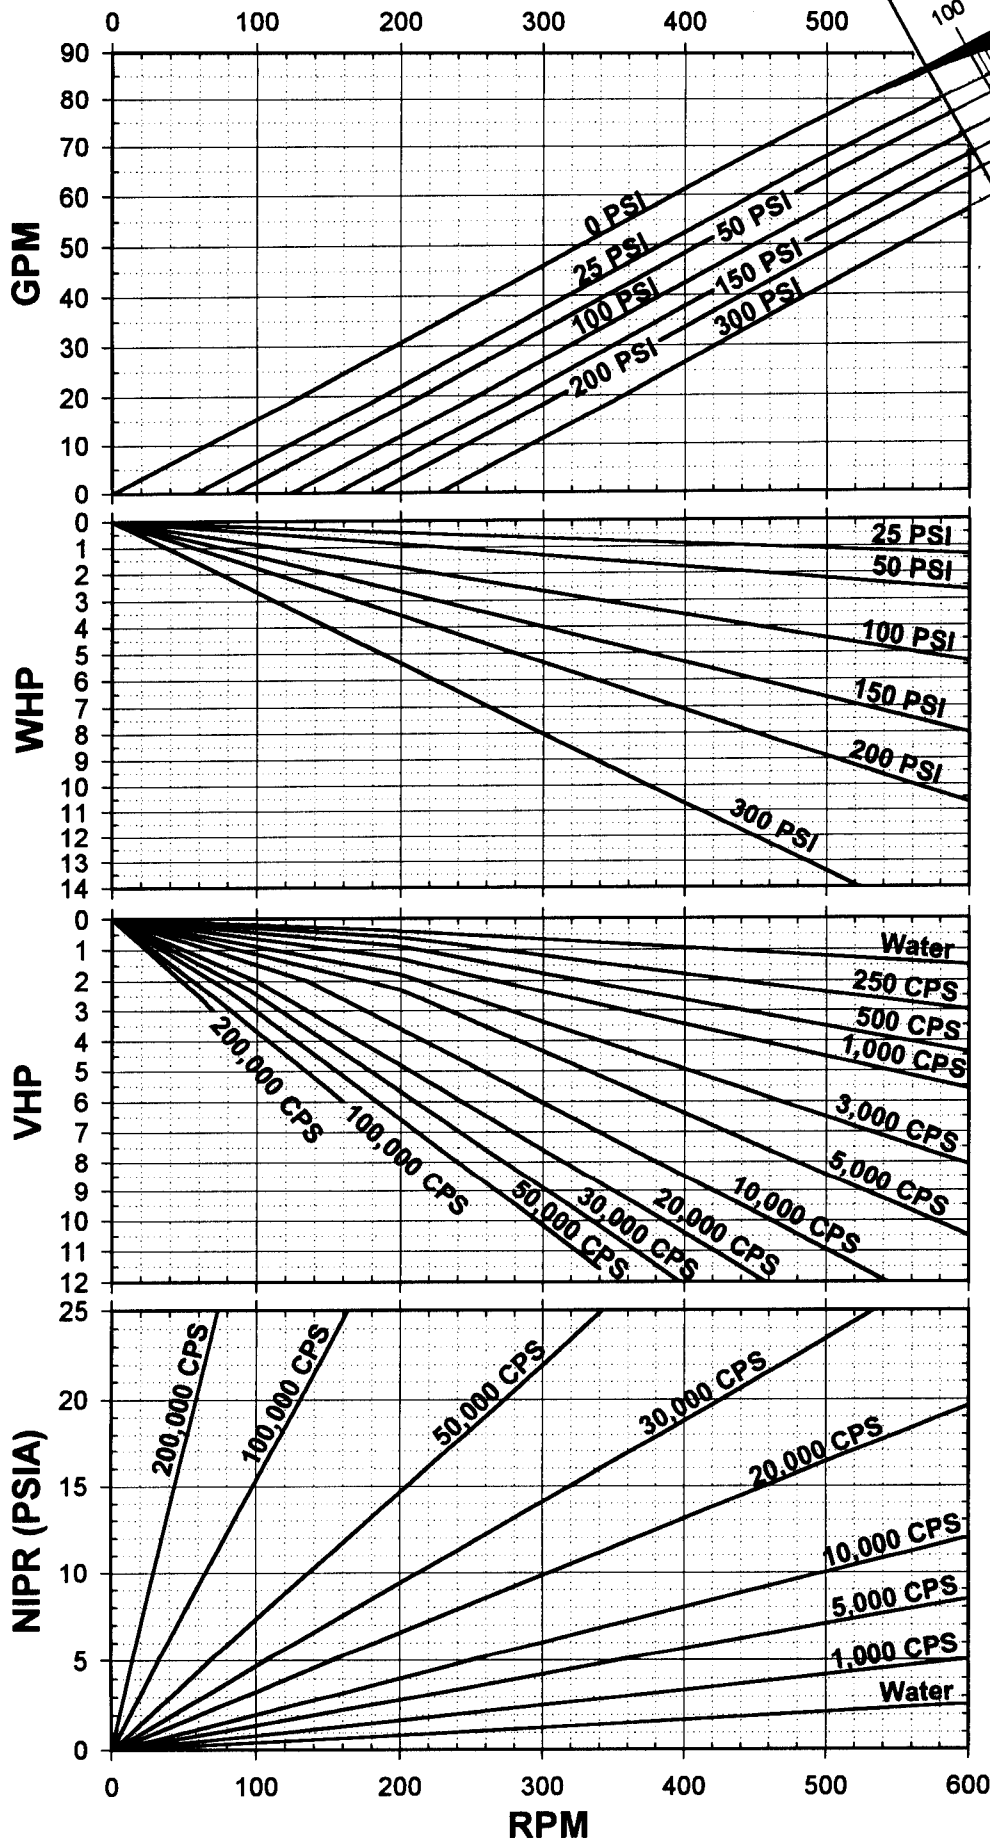

**Universal II
Sanitary Pumps
Model**

060-U2

Alloy 88 Rotors
Standard Clearance
Standard Port Size = 2.5"
Displacement =
0.153 Gal/Rev

BHP = WHP + VHP



**Waukesha
Cherry-Burrell**

611 Sugar Creek Road
Delavan, WI 53115 USA
Tel: 1-800-252-5200 or 262-728-1900
Fax 1-800-252-5012 or 262-728-4904
E-mail: custserv@gowcb.com
Web Site: <http://www.gowcb.com>

Effective Date: 12-10-1999
Specifications subject
to change without notice

Curve Number
95-07079