


Capacity / WHP / VHP / NIPR

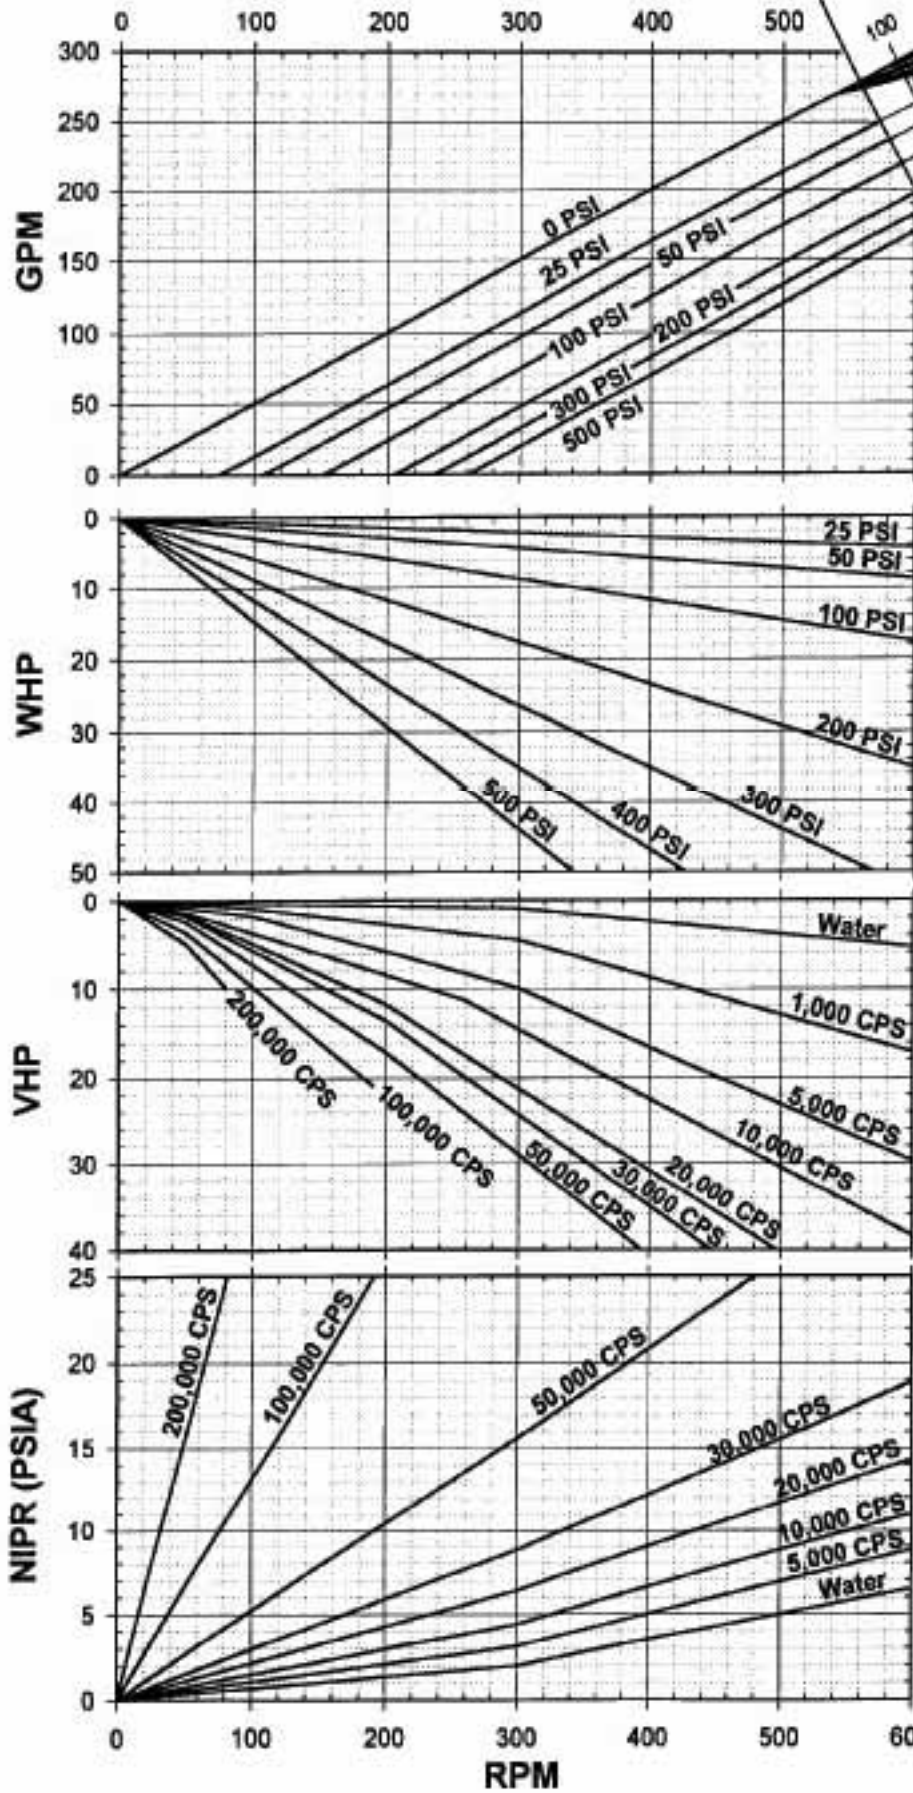

**Universal II
Rectangular Flange
Model**

214

Alloy 88 Rotors
Standard Clearance
Standard Port Size = 4.0"
Displacement =
0.502 Gal/Rev

BHP = WHP + VHP



**Waukesha
Cherry-Burrell**

611 Sugar Creek Road
Delavan, WI 53115 USA
Tel: 1-800-252-5200 or 262-728-1900
Fax: 1-800-252-5012 or 262-728-4904
E-mail: custserv@gowcb.com
Web-Site: <http://www.gowcb.com>

Effective Date: **01-01-06**
Specifications subject
to change without notice

Curve Number
95-07158