


PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85° F MAXIMUM UNLESS
OTHERWISE SPECIFIED



E12HC
1180 RPM


CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF STAGES	1	3	5	DESIGN	GPM	TDH	HP	EFF
	NUMBER OF POINTS	-2	-1	0					

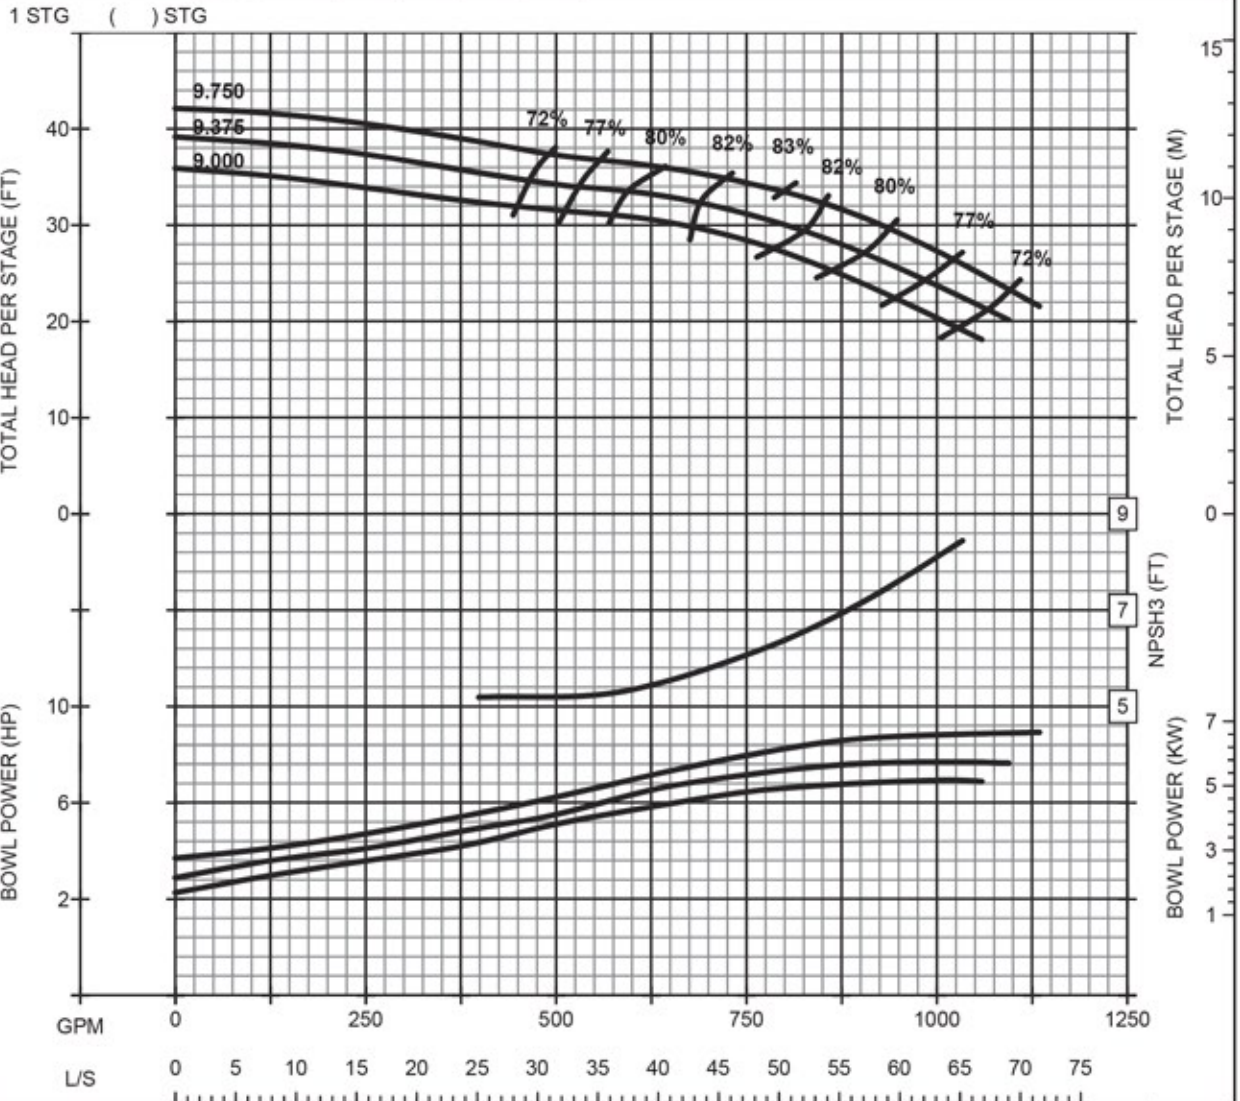

DIMENSIONS IN INCHES	A	B	C ADD/STG	E	F	G	H*	J	K	L	M	N
	11.62	4.56	10.50	10.88	9.44	1.56	26.00	8.25	10.06	7.25	3.50	25.94

PUMP DATA

IMPELLER:	ENCLOSED	BOWL CONNECTION:	FLANGED
NO. OF VANES:	6	DISCHARGE SIZE:	8"
THRUST CONSTANT:	7.3	SUCTION SIZE:	8"
LATERAL (STD):	1.0"	STD. TUBE:	2.5", 3.0"
EYE AREA IN ² :	14.07	WR ² LB-FT ² :	1.2
SHAFT DIA:	1.687	1ST STG WT LB:	197
		ADD STG WT LB:	98

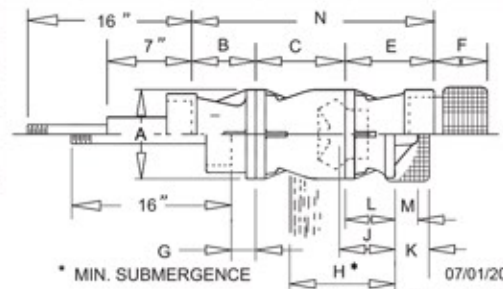

*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.
PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.

* MIN. SUBMERGENCE
07/01/2012
CVE12HC6P6CY

