


PERFORMANCE BASED ON  
PUMPING CLEAR, FRESH  
NON-AERATED WATER AT  
85° F MAXIMUM UNLESS  
OTHERWISE SPECIFIED



**H24MC-S**  
880 RPM

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF STAGES	—	—	—	—	DESIGN	GPM	TDH	HP	EFF
	NUMBER OF POINTS	—	—	—	—					


1 STG ( ) STG

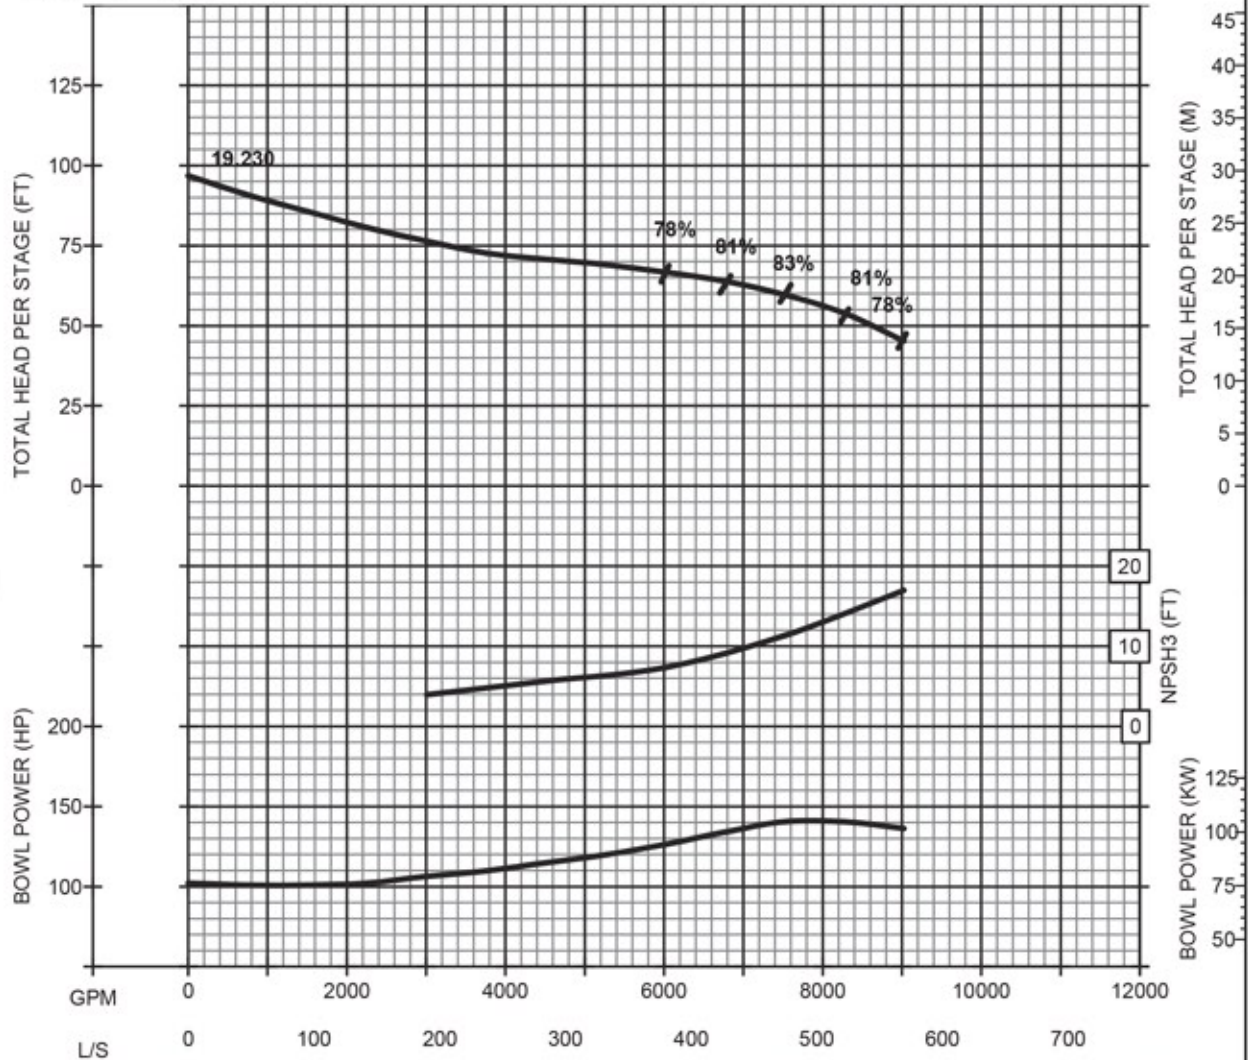

DIMENSIONS IN INCHES	A**	B	C ADD/STG	E	F	G	H*	J	K	L	M	N
	23.25	N/A	21.75	N/A	N/A	N/A	48.00	11.75	16.00	11.50	5.63	N/A

**PUMP DATA**

IMPELLER:	ENCLOSED	BOWL CONNECTION:	FLANGED
NO. OF VANES:	6	DISCHARGE SIZE:	FLANGED
THRUST CONSTANT:	78.1	SUCTION SIZE:	BELL
LATERAL (STD):	1.25	STD. TUBE:	N/A
EYE AREA IN <sup>2</sup> :	146.50	WR <sup>2</sup> LB-FT <sup>2</sup> :	51.1
SHAFT DIA:	2.688	1ST STG WT LB:	762
		ADD STG WT LB:	N/A

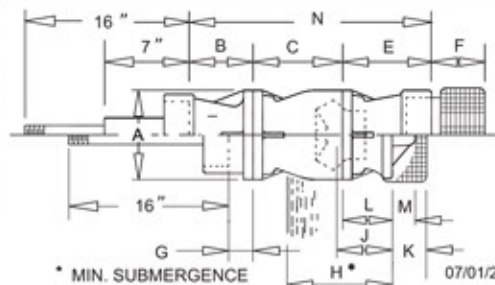

\*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.

PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.

\*\*BELL DIAMETER IS 28.75.

\*\*\*LOW NPSH IMPELLER FOR 1ST STAGE ONLY.

\* MIN. SUBMERGENCE

07/01/2012

CVH24MC-S8P6CY

CURVE TEMPLATE 08.05.2011

880  
CURVES

