

PERFORMANCE BASED ON PUMPING CLEAR, FRESH NON-AERATED WATER AT 85° F MAXIMUM UNLESS OTHERWISE SPECIFIED



H30HC
880 RPM

CHANGE EFFICIENCY AS FOLLOWS


NUMBER OF STAGES
NUMBER OF POINTS

1	2		
-1	0		

DESIGN GPM TDH HP EFF

1 STG () STG

TEMPORARY CURVE, CONTACT FACTORY

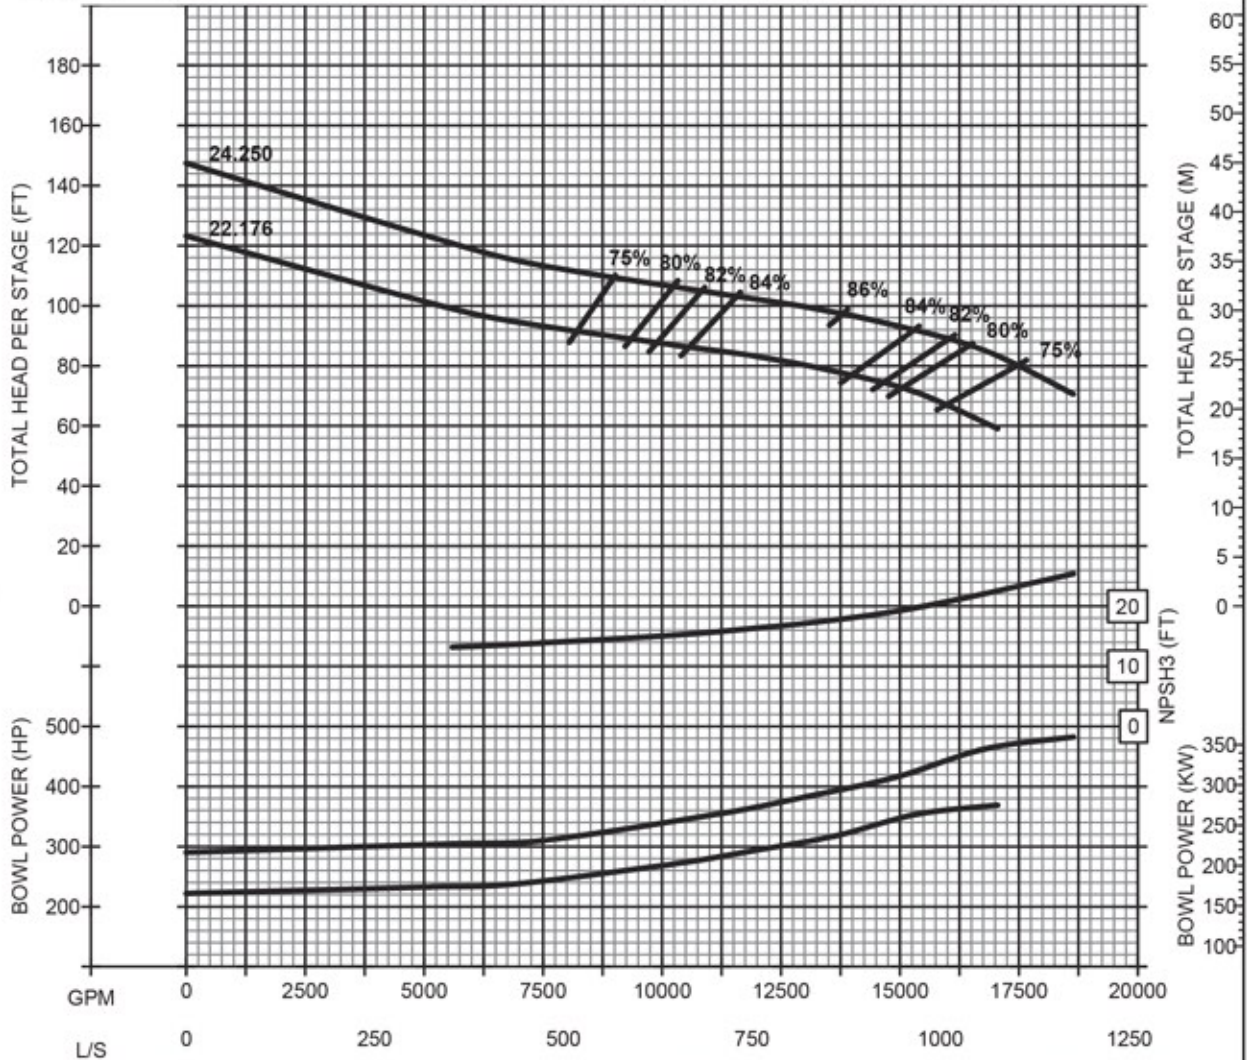


DIMENSIONS IN INCHES	A	B	C	E	F	G	H*	J	K	L	M	N
	29.10	N/A	21.75	N/A	N/A	N/A	60.00	14.00	18.00	14.50	7.00	N/A

PUMP DATA

IMPELLER:	ENCLOSED	BOWL CONNECTION:	FLANGED
NO. OF VANES:	8	DISCHARGE SIZE:	N/A
THRUST CONSTANT:	85.0	SUCTION SIZE:	N/A
LATERAL (STD):	1.50	STD. TUBE:	N/A
EYE AREA IN ² :	187.0	WR ² LB-FT ² :	101
SHAFT DIA:	3.50	1ST STG WT LB:	2020
		ADD STG WT LB:	1472

*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.

PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.

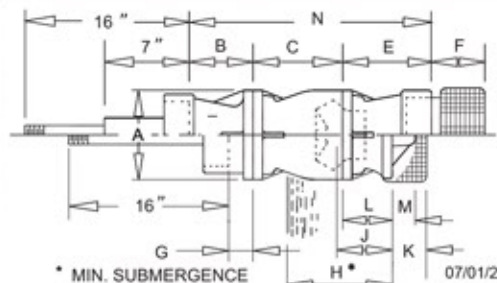

07/01/2012
CVH30HC8P6CY

CURVE TEMPLATE 08.05.2011

880
CURVES

