


PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85° F MAXIMUM UNLESS
OTHERWISE SPECIFIED



H30HC-S
880 RPM

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF STAGES	1	2			DESIGN	GPM	TDH	HP	EFF
	NUMBER OF POINTS	-1	0							

1 STG () STG **TEMPORARY CURVE, CONTACT FACTORY**

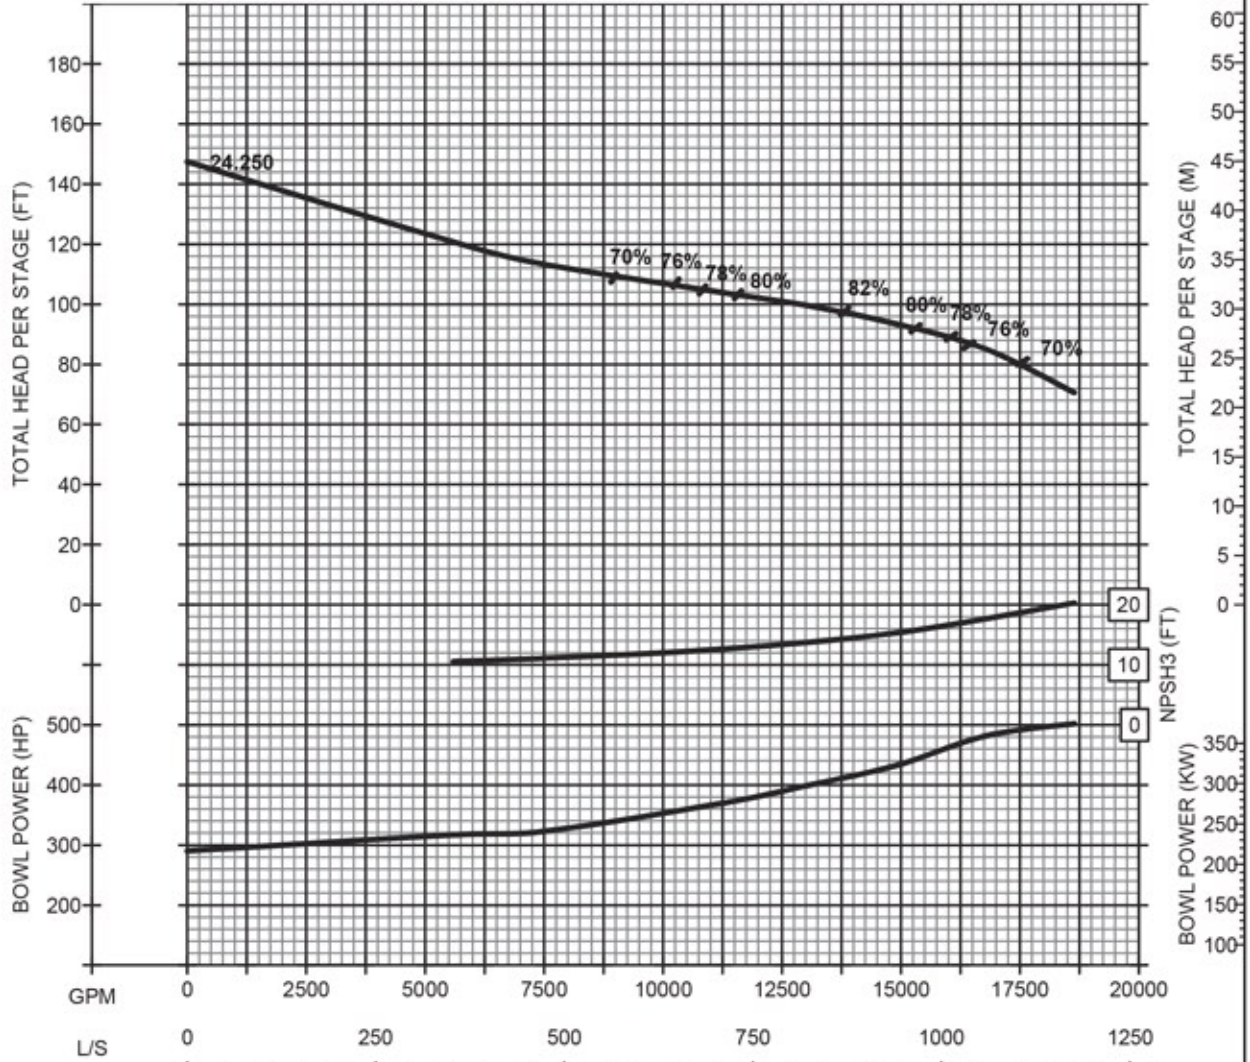


DIMENSIONS IN INCHES	A	B	C ADD/STG	E	F	G	H*	J	K	L	M	N
	29.10	N/A	21.75	N/A	N/A	N/A	60.00	14.00	18.00	14.50	7.00	N/A

PUMP DATA

IMPELLER:	ENCLOSED	BOWL CONNECTION:	FLANGED
NO. OF VANES:	8	DISCHARGE SIZE:	N/A
THRUST CONSTANT:	85.0	SUCTION SIZE:	N/A
LATERAL (STD):	1.50	STD. TUBE:	N/A
EYE AREA IN ² :	187.0	WR ² LB-FT ² :	101
SHAFT DIA:	3.50	1ST STG WT LB:	2020
		ADD STG WT LB:	1472

*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.
PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.
LOW NPSH IMPELLER FOR 1ST ONLY

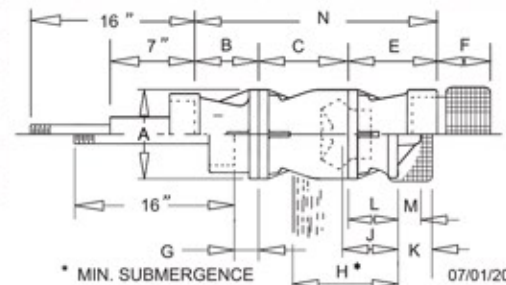

* MIN. SUBMERGENCE 07/01/2012
CVH30HC-S8P6CY