


PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85° F MAXIMUM UNLESS
OTHERWISE SPECIFIED



H30MC
880 RPM

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF STAGES	1	2			DESIGN	GPM	TDH	HP	EFF
	NUMBER OF POINTS	-1	0							

1 STG () STG **TEMPORARY CURVE, CONTACT FACTORY**

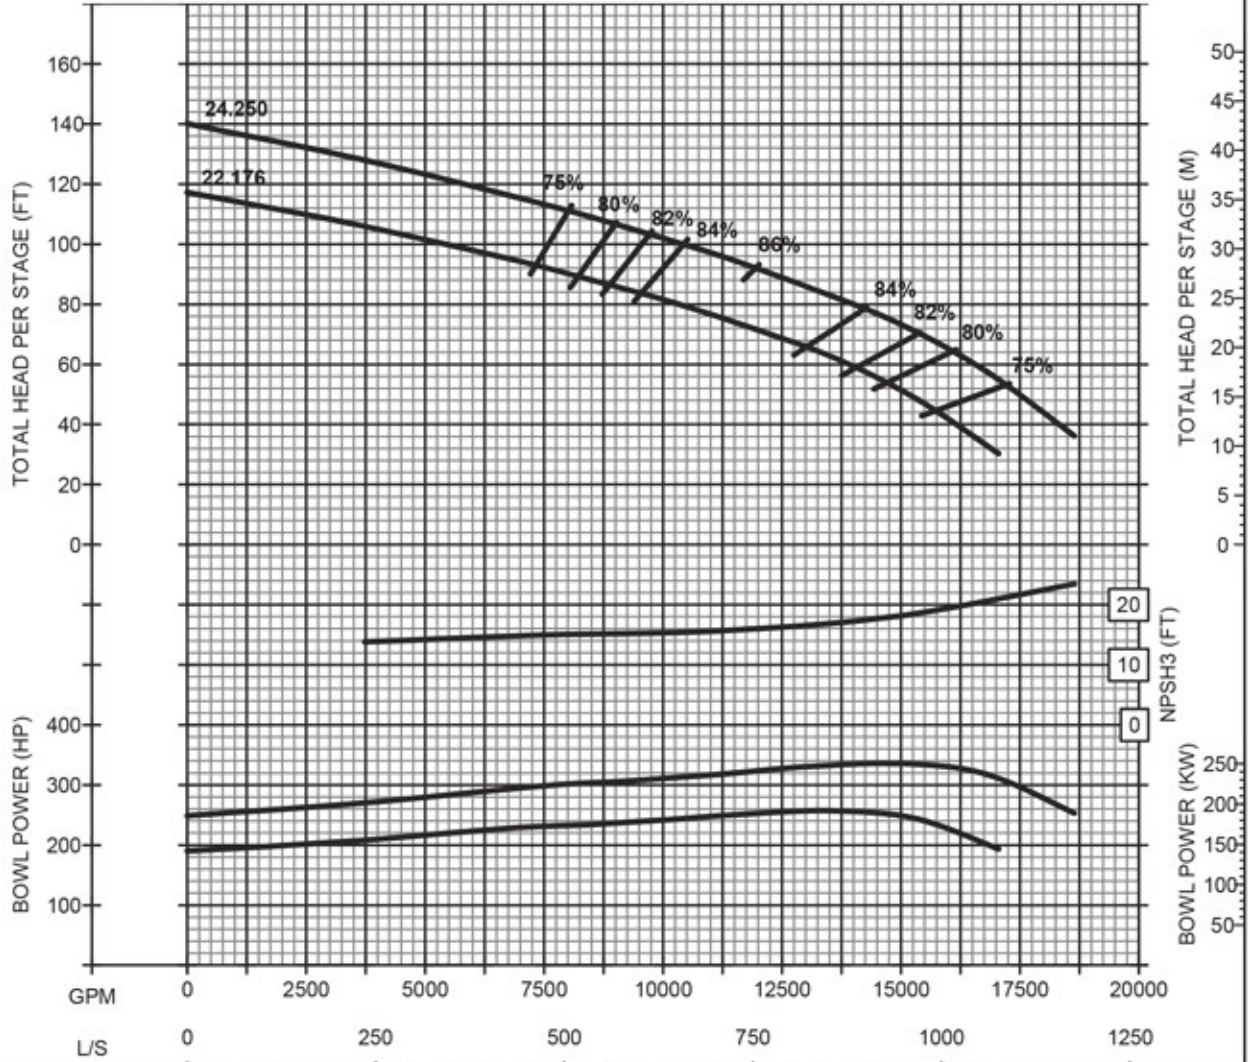


DIMENSIONS IN INCHES	A	B	C ADD/STG	E	F	G	H*	J	K	L	M	N
	29.10	N/A	21.75	N/A	N/A	N/A	60.00	14.00	18.00	14.50	7.00	N/A

PUMP DATA

IMPELLER:	ENCLOSED	BOWL CONNECTION:	FLANGED
NO. OF VANES:	5	DISCHARGE SIZE:	N/A
THRUST CONSTANT:	85.0	SUCTION SIZE:	N/A
LATERAL (STD):	1.50	STD. TUBE:	N/A
EYE AREA IN ² :	187.0	WR ² LB-FT ² :	101
SHAFT DIA:	3.50	1ST STG WT LB:	2020
		ADD STG WT LB:	1472

*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.
PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.

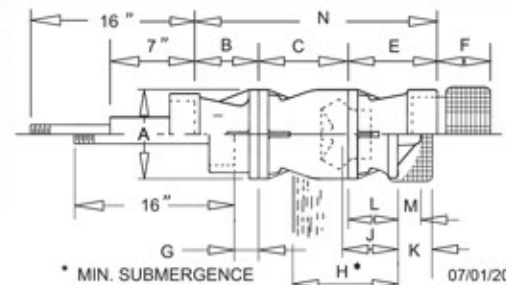

* MIN. SUBMERGENCE

07/01/2012

CVH30MC8P6CY

CURVE TEMPLATE 08.05.2011

880
CURVES

