


PERFORMANCE BASED ON PUMPING CLEAR, FRESH NON-AERATED WATER AT 85° F MAXIMUM UNLESS OTHERWISE SPECIFIED



J8XHC
1770 RPM

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF STAGES	1	2	3	5	DESIGN	GPM	TDH	HP	EFF
	NUMBER OF POINTS	-3	-2	-1	0					

1 STG () STG

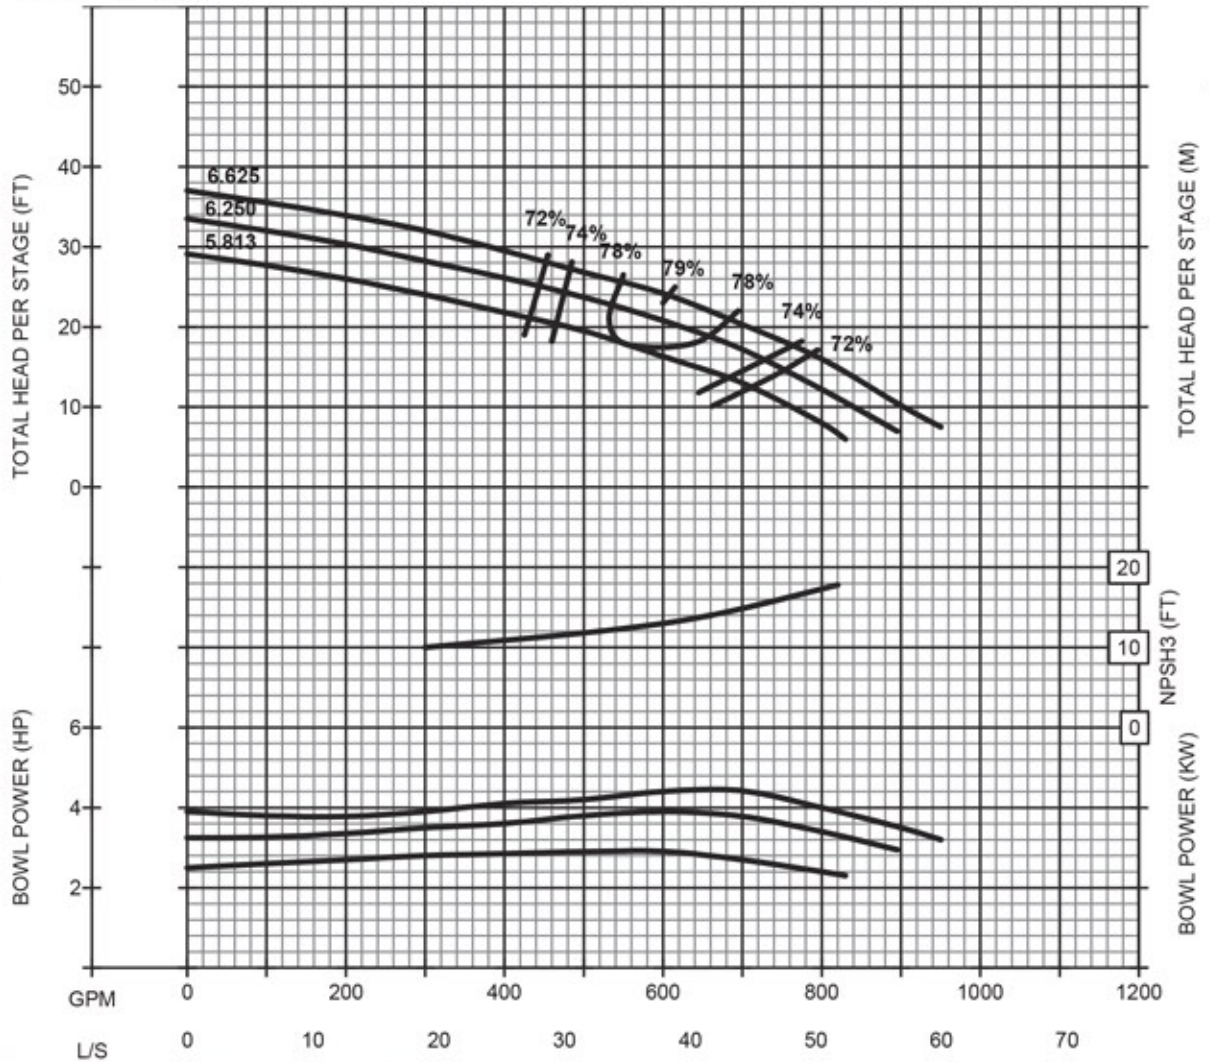


DIMENSIONS IN INCHES	A	B	C ADD/STG	E	F	G	H*	J	K	L	M	N
	7.75	8.50	8.88	9.25	6.63	1.12	14.00	N/A	N/A	N/A	N/A	26.63

PUMP DATA

IMPELLER:	ENCLOSED	BOWL CONNECTION:	THREADED
NO. OF VANES:	6	DISCHARGE SIZE:	6"
THRUST CONSTANT:	5.4	SUCTION SIZE:	6"
LATERAL (STD):	1.38	STD. TUBE:	2"
EYE AREA IN ² :	12.81	WR ² LB-FT ² :	0.36
SHAFT DIA:	1.25	1ST STG WT LB:	140
		ADD STG WT LB:	62

*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.
PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.

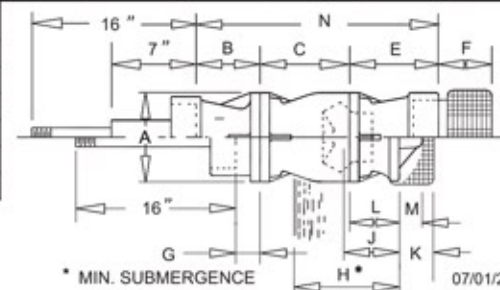

* MIN. SUBMERGENCE

07/01/2012

CVJ8XHC4P6CY

CURVE TEMPLATE 08.05.2011

