

PERFORMANCE BASED ON PUMPING CLEAR, FRESH NON-AERATED WATER AT 85° F MAXIMUM UNLESS OTHERWISE SPECIFIED




K20HC
1180 RPM

CHANGE EFFICIENCY AS FOLLOWS

NUMBER OF STAGES	1	2		
NUMBER OF POINTS	-2	0		

DESIGN GPM TDH HP EFF

1 STG () STG

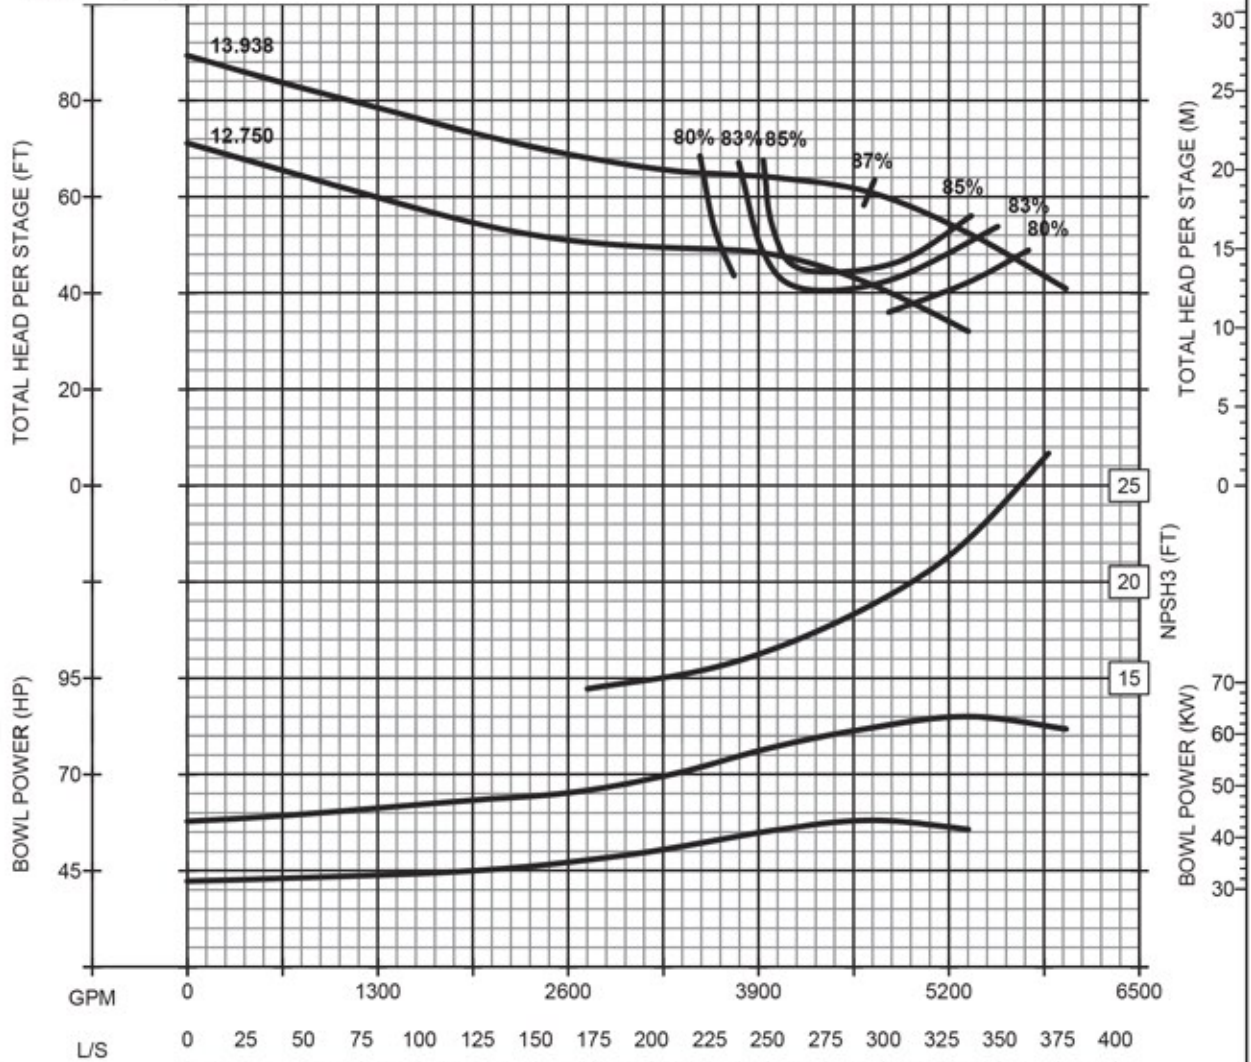


DIMENSIONS IN INCHES	A	B	C ADD/STG	E	F	G	H*	J	K	L	M	N
	19.25	N/A	18.25	N/A	N/A	1.81	48.00	11.25	13.88	10.50	5.13	N/A

PUMP DATA

IMPELLER:	ENCLOSED	BOWL CONNECTION:	FLANGED
NO. OF VANES:	8	DISCHARGE SIZE:	12", 14"
THRUST CONSTANT:	33.0	SUCTION SIZE:	BELL
LATERAL (STD):	1.00	STD. TUBE:	N/A
EYE AREA IN ² :	72.6	WR ² LB-FT ² :	20.26
SHAFT DIA:	2.438	1ST STG WT LB:	730
		ADD STG WT LB:	510

*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.
PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.

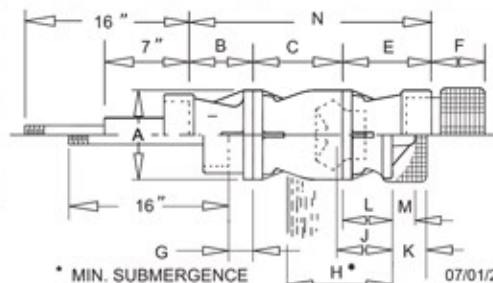

07/01/2012
CVK20HC6P6CY

