

PERFORMANCE BASED ON PUMPING CLEAR, FRESH NON-AERATED WATER AT 85° F MAXIMUM UNLESS OTHERWISE SPECIFIED



**K20LC**  
1180 RPM


CHANGE EFFICIENCY AS FOLLOWS

NUMBER OF STAGES  
NUMBER OF POINTS

1	2		
-2	0		

DESIGN    GPM    TDH    HP    EFF

1 STG ( ) STG

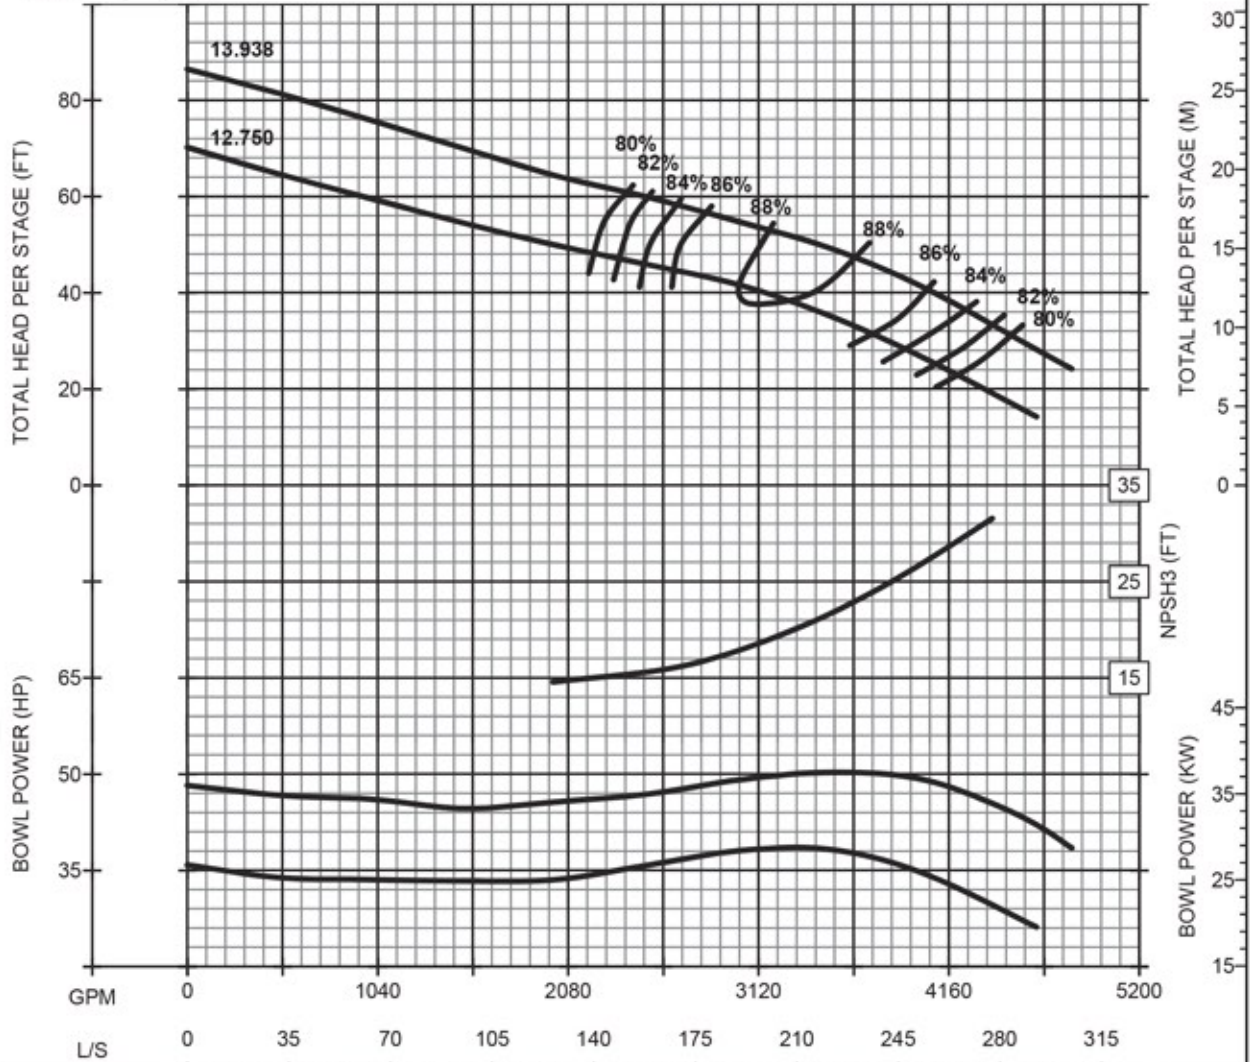


DIMENSIONS IN INCHES	A	B	C ADD/STG	E	F	G	H*	J	K	L	M	N
	19.25	6.44	18.25	N/A	N/A	1.81	48.00	11.25	13.88	10.50	5.125	N/A

**PUMP DATA**

IMPELLER:	ENCLOSED	BOWL CONNECTION:	FLANGED
NO. OF VANES:	5	DISCHARGE SIZE:	12", 14"
THRUST CONSTANT:	33.0	SUCTION SIZE:	BELL
LATERAL (STD):	1.00	STD. TUBE:	N/A
EYE AREA IN <sup>2</sup> :	72.6	WR <sup>2</sup> LB-FT <sup>2</sup> :	20.26
SHAFT DIA:	2.438	1ST STG WT LB:	730
		ADD STG WT LB:	510

\*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.  
PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.

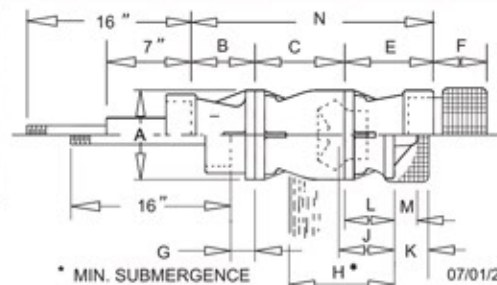

\* MIN. SUBMERGENCE

07/01/2012

CVK20LC6P8CY

CURVE TEMPLATE 08.05.2011

