


PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85° F MAXIMUM UNLESS
OTHERWISE SPECIFIED



K20MC
1180 RPM

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF STAGES	1	2		DESIGN	GPM	TDH	HP	EFF
	NUMBER OF POINTS	-2	0						

1 STG () STG

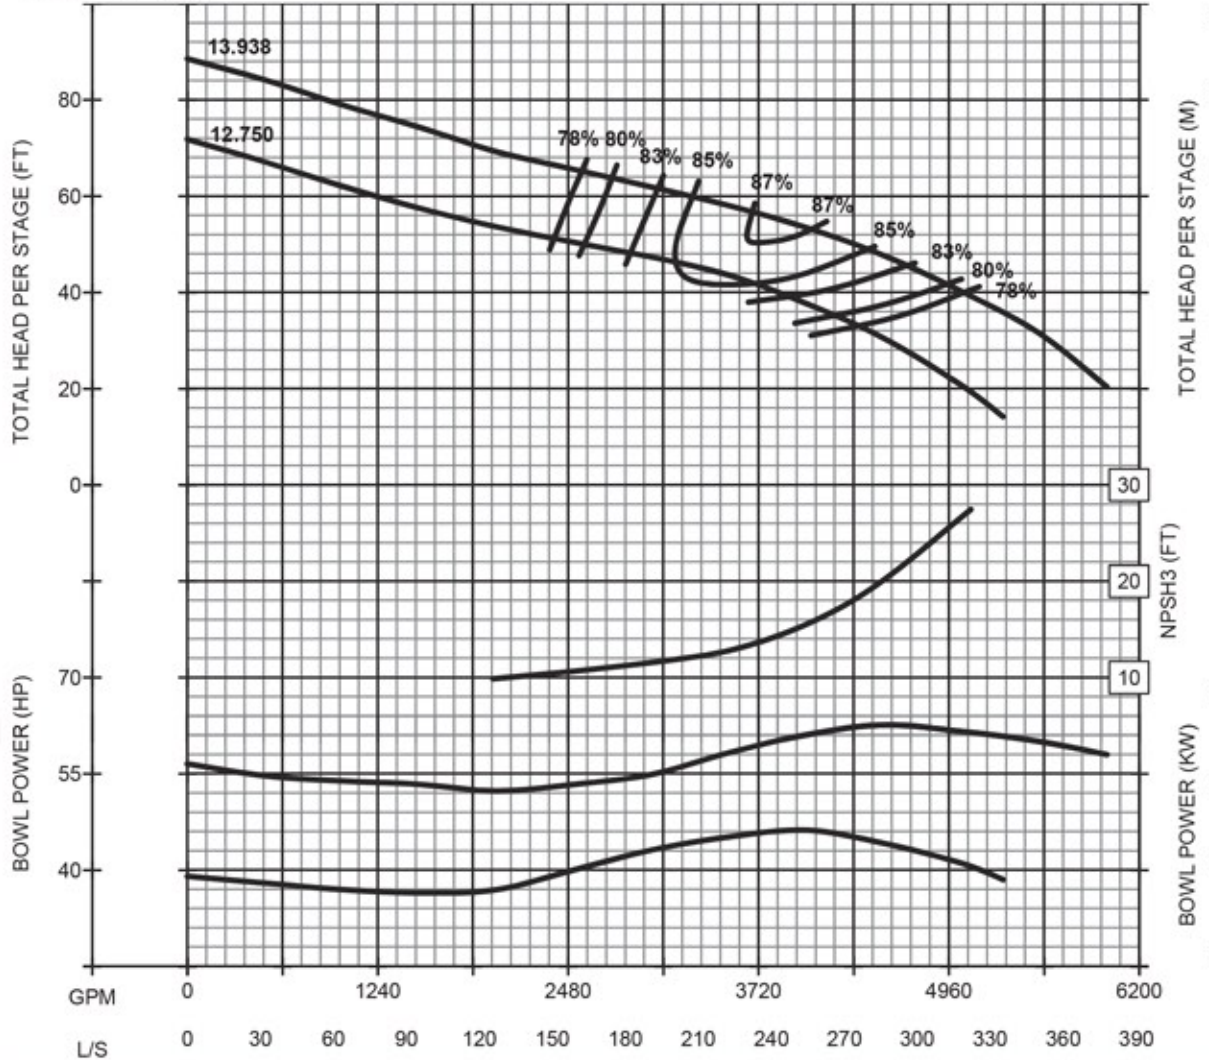

DIMENSIONS IN INCHES	A	B	C ADD/STG	E	F	G	H*	J	K	L	M	N
	19.25	6.44	18.25	N/A	N/A	1.81	48.00	11.25	13.88	10.50	5.125	N/A

PUMP DATA

IMPELLER:	ENCLOSED	BOWL CONNECTION:	FLANGED
NO. OF VANES:	6	DISCHARGE SIZE:	12", 14"
THRUST CONSTANT:	33.0	SUCTION SIZE:	BELL
LATERAL (STD):	1.00	STD. TUBE:	4"
EYE AREA IN ² :	72.6	WR ² LB-FT ² :	20.26
SHAFT DIA:	2.438	1ST STG WT LB:	730
		ADD STG WT LB:	510

*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.
PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.

