


PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85° F MAXIMUM UNLESS
OTHERWISE SPECIFIED



K20MC
880 RPM

| | | | | | | | | | | |
|---------------------------------|------------------|----|---|--|--|--------|-----|-----|----|-----|
| CHANGE EFFICIENCY AS FOLLOWS | NUMBER OF STAGES | 1 | 2 | | | DESIGN | GPM | TDH | HP | EFF |
| | NUMBER OF POINTS | -2 | 0 | | | | | | | |

1 STG () STG

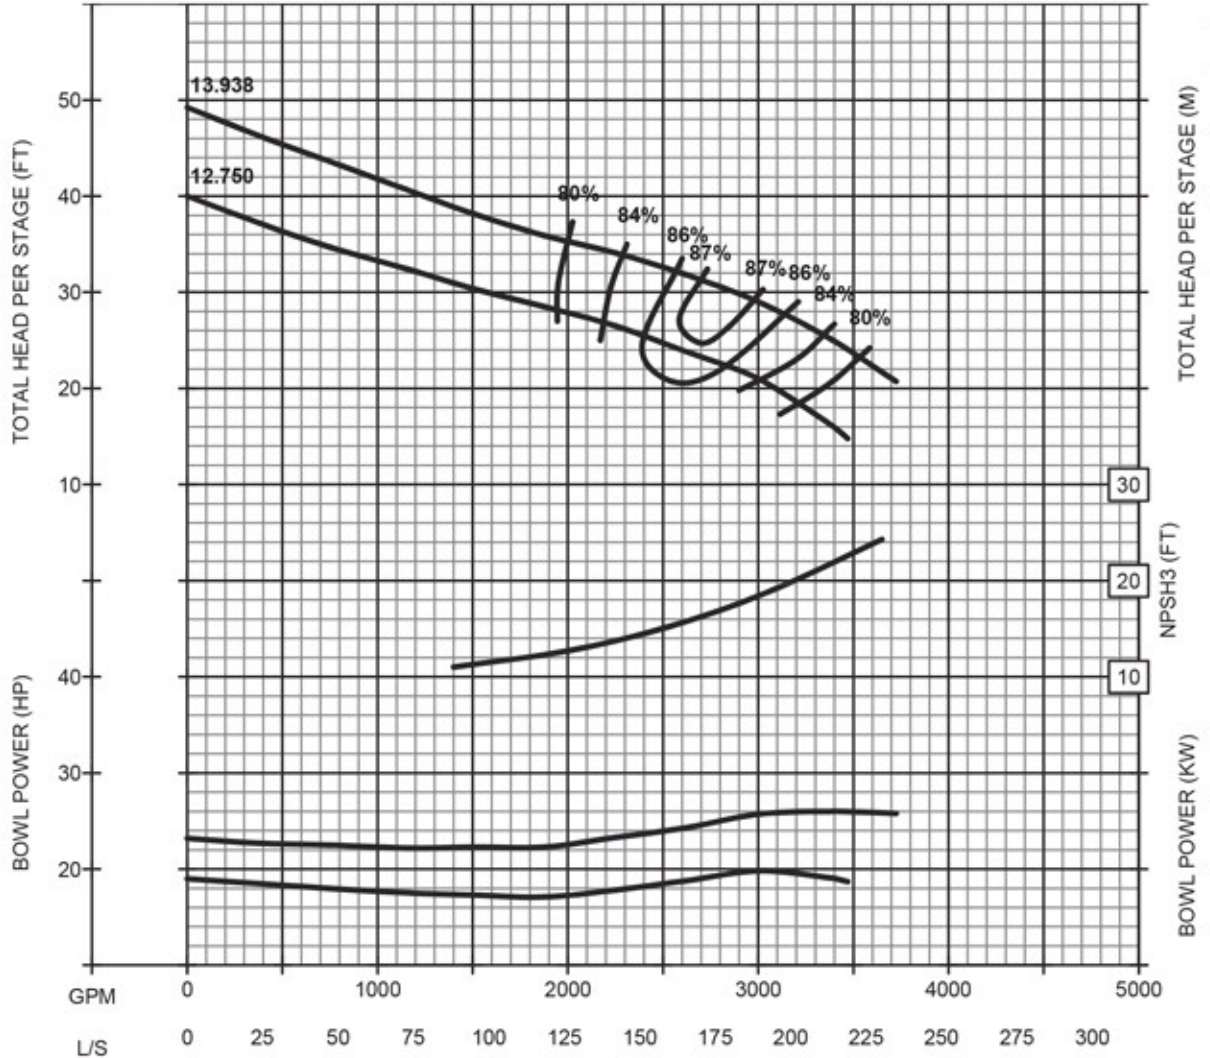


| | | | | | | | | | | | | |
|----------------------|-------|------|--------------|-----|-----|------|-------|-------|-------|-------|-------|-----|
| DIMENSIONS IN INCHES | A | B | C ADD/STG | E | F | G | H* | J | K | L | M | N |
| | 19.25 | 6.44 | 18.25 | N/A | N/A | 1.81 | 48.00 | 11.25 | 13.88 | 10.50 | 5.125 | N/A |

PUMP DATA

| | | | |
|----------------------------|----------|--------------------------------------|----------|
| IMPELLER: | ENCLOSED | BOWL CONNECTION: | FLANGED |
| NO. OF VANES: | 6 | DISCHARGE SIZE: | 12", 14" |
| THRUST CONSTANT: | 33.0 | SUCTION SIZE: | BELL |
| LATERAL (STD): | 1.00 | STD. TUBE: | N/A |
| EYE AREA IN ² : | 72.6 | WR ² LB-FT ² : | 20.26 |
| SHAFT DIA: | 2.438 | 1ST STG WT LB: | 730 |
| | | ADD STG WT LB: | 510 |

*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.
PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.

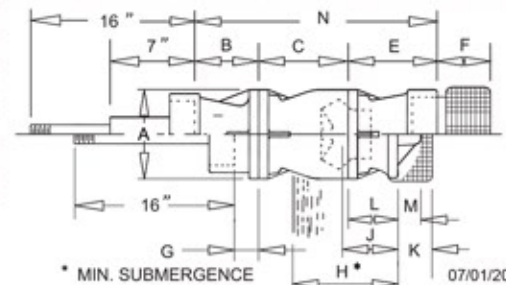

* MIN. SUBMERGENCE

07/01/2012

CVK20MC8P6CY

CURVE TEMPLATE 08.05.2011

880
CURVES

