


PERFORMANCE BASED ON
PUMPING CLEAR, FRESH
NON-AERATED WATER AT
85° F MAXIMUM UNLESS
OTHERWISE SPECIFIED



L10HC
1770 RPM

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF STAGES	1	2	3	DESIGN	GPM	TDH	HP	EFF
	NUMBER OF POINTS	-3	-2	0					

1 STG () STG **TEMPORARY CURVE, CONTACT FACTORY**

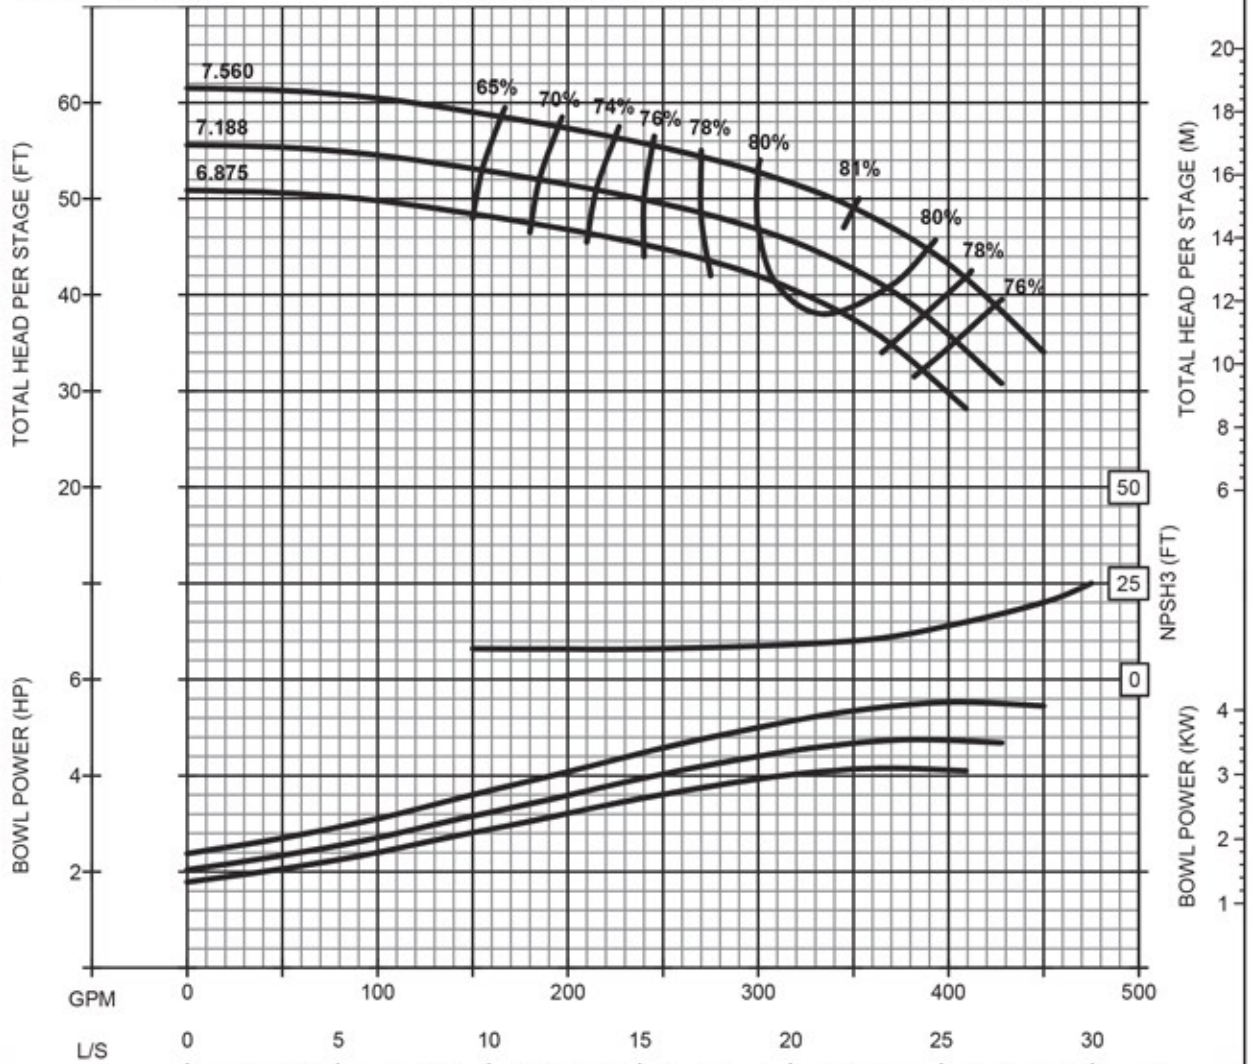


DIMENSIONS IN INCHES	A	B	C ADD/STG	E	F	G	H*	J	K	L	M	N
	9.83	5.18	6.50	N/A	N/A	1.43	16.00	4.00		4.13	3.75	N/A

PUMP DATA

IMPELLER:	ENCLOSED	BOWL CONNECTION:	FLANGED
NO. OF VANES:	7	DISCHARGE SIZE:	6"
THRUST CONSTANT:	4.60	SUCTION SIZE:	N/A
LATERAL (STD):	0.50	STD. TUBE:	2.5"
EYE AREA IN ² :	8.53	WR ² LB-FT ² :	0.44
SHAFT DIA:	1.50	1ST STG WT LB:	175
		ADD STG WT LB:	75

*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.
PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.

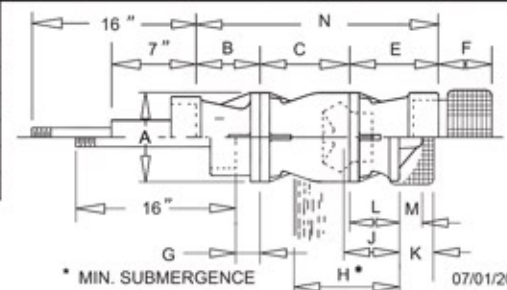

* MIN. SUBMERGENCE

07/01/2012

CVL10HC4P6CY

CURVE TEMPLATE 08.05.2011

