

PERFORMANCE BASED ON PUMPING CLEAR, FRESH NON-AERATED WATER AT 85° F MAXIMUM UNLESS OTHERWISE SPECIFIED




**L10HC-S**  
1770 RPM

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF STAGES	-	-	-	-	DESIGN	GPM	TDH	HP	EFF
	NUMBER OF POINTS	-	-	-	-					

1 STG ( ) STG

TEMPORARY CURVE, CONTACT FACTORY

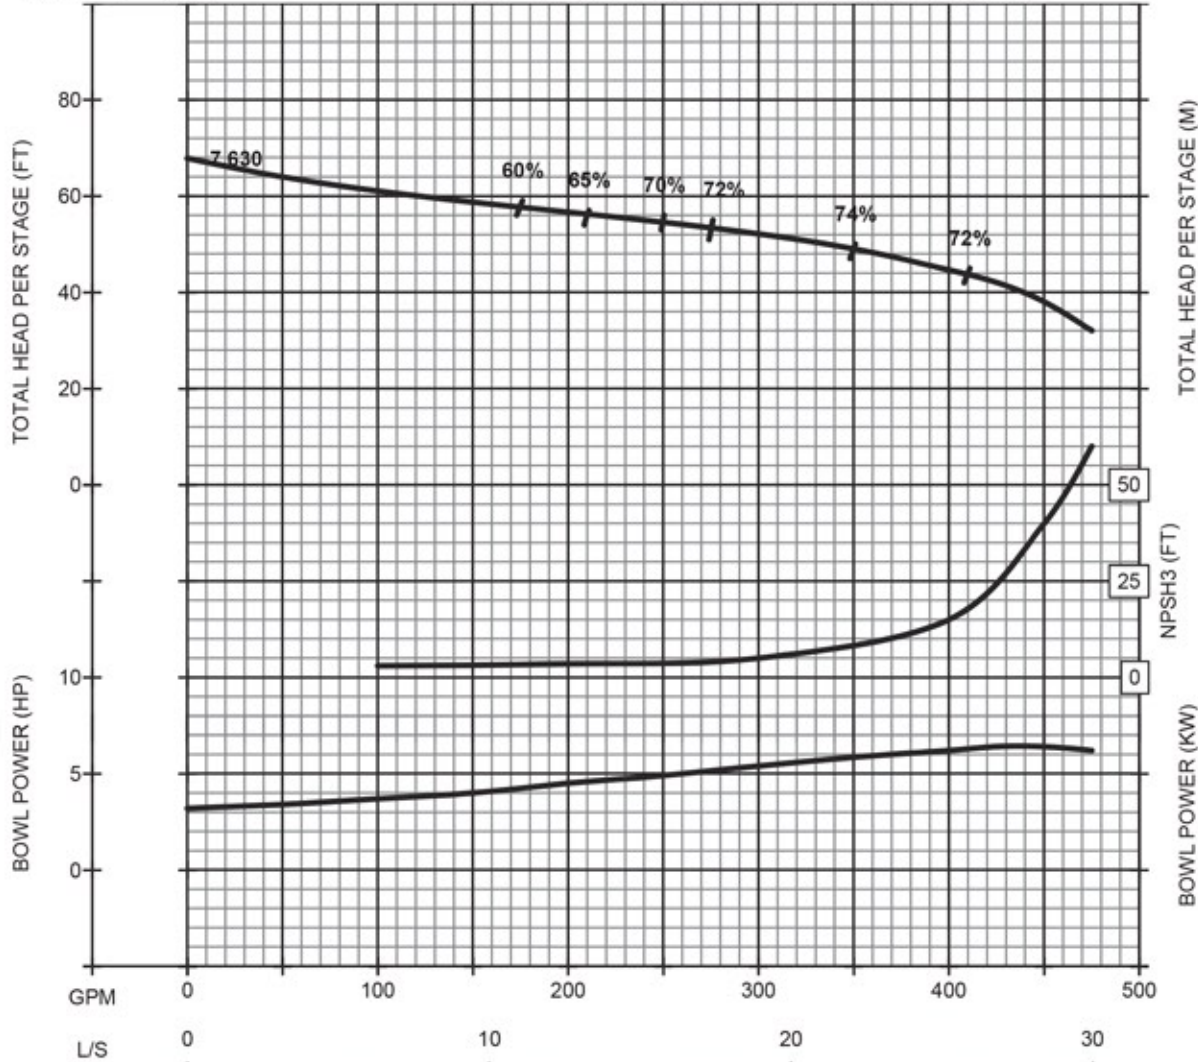

DIMENSIONS IN INCHES	A	B	C ADD/STG	E	F	G	H*	J	K	L	M	N
	9.83	5.18	6.50	N/A	N/A	1.43	16.00	4.00		4.13	3.75	N/A


PUMP DATA

IMPELLER:	ENCLOSED	BOWL CONNECTION:	FLANGED
NO. OF VANES:	5	DISCHARGE SIZE:	6"
THRUST CONSTANT:	8.80	SUCTION SIZE:	N/A
LATERAL (STD):	0.50	STD. TUBE:	2.5"
EYE AREA IN <sup>2</sup> :	18.66	WR <sup>2</sup> LB-FT <sup>2</sup> :	0.44
SHAFT DIA:	1.50	1ST STG WT LB:	175
		ADD STG WT LB:	75

\*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.

PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.

\*\*\*LOW NPSH IMPELLER FOR 1ST STAGE ONLY\*\*\*

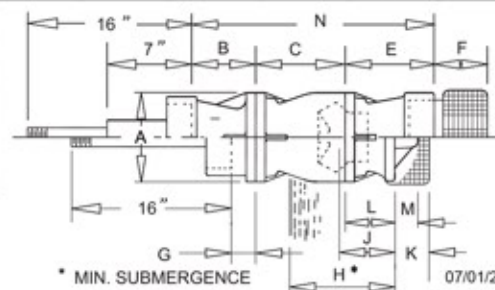

\* MIN. SUBMERGENCE

07/01/2012

CVL10HC-S4P6CY

CURVE TEMPLATE 08.05.2011

1770  
CURVES

