


PERFORMANCE BASED ON PUMPING CLEAR, FRESH NON-AERATED WATER AT 85° F MAXIMUM UNLESS OTHERWISE SPECIFIED



**M9MC**  
1770 RPM

CHANGE EFFICIENCY AS FOLLOWS	NUMBER OF STAGES	1	4	6	DESIGN	GPM	TDH	HP	EFF
	NUMBER OF POINTS	-3	-2	0					

1 STG ( ) STG

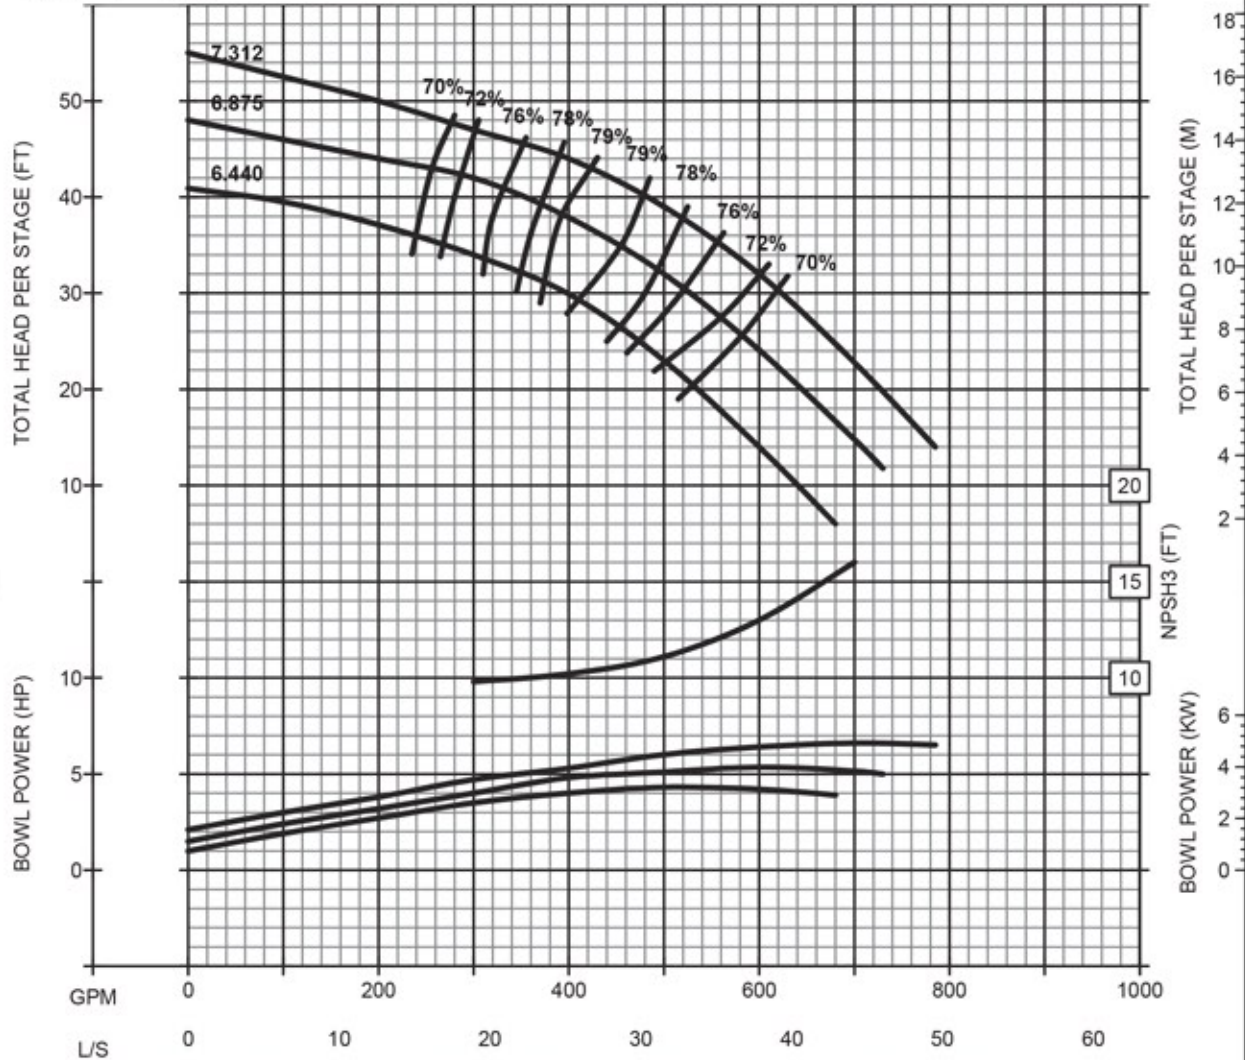


DIMENSIONS IN INCHES	A	B	C ADD/STG	E	F	G	H*	J	K	L	M	N
	9.00	5.53	8.00	8.38	2.94	7.47	14.50	6.50	6.13	5.62	2.50	21.91

**PUMP DATA**

IMPELLER:	ENCLOSED	BOWL CONNECTION:	FLANGED
NO. OF VANES:	5	DISCHARGE SIZE:	5", 6"
THRUST CONSTANT:	5.1	SUCTION SIZE:	6"
LATERAL (STD):	0.625	STD. TUBE:	2"
EYE AREA IN <sup>2</sup> :	9.69	WR <sup>2</sup> LB-FT <sup>2</sup> :	0.47
SHAFT DIA:	1.25	1ST STG WT LB:	138
		ADD STG WT LB:	56

\*THIS DIMENSION TO BE USED WITH NPSH3. PUMP INSTALLATION AND SYSTEM MUST SATISFY BOTH VALUES.  
PERFORMANCE BASED ON CAST IRON ENAMELED BOWLS AND BRONZE IMPELLER UNLESS OTHERWISE SPECIFIED.

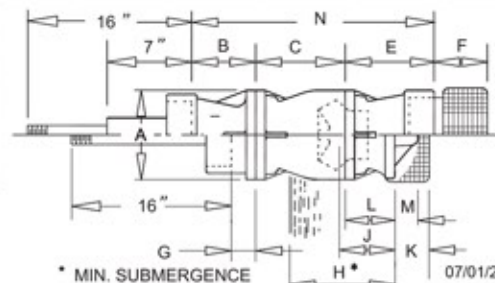

07/01/2012  
CVM9MC4P6CY

