


60P	a	f	w	H	Ød	h1	h2	n1	n2	DNA	DNM
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
40/2	181	260	196,5	220	11	202	100	115	160	1 1/2	1 1/2
40/3	213	260	228,5	220	11	202	100	115	160	1 1/2	1 1/2
40/4	245	297	260,5	247(*)	11	202	100	115	207(*)	1 1/2	1 1/2

60P 60 Hz	P ₂		P ₁	230V 1~		460V 3~
	kW	HP	kW	I _n	C	I _n
				(A)	450 V _C (μF)	(A)
40/2	1,1	1,5	1,6	9,0	31,5	3,1
40/3	1,5	2	2,4	12,5	40	5,0
40/4	2,2	3	3,1	16,0	50	5,2

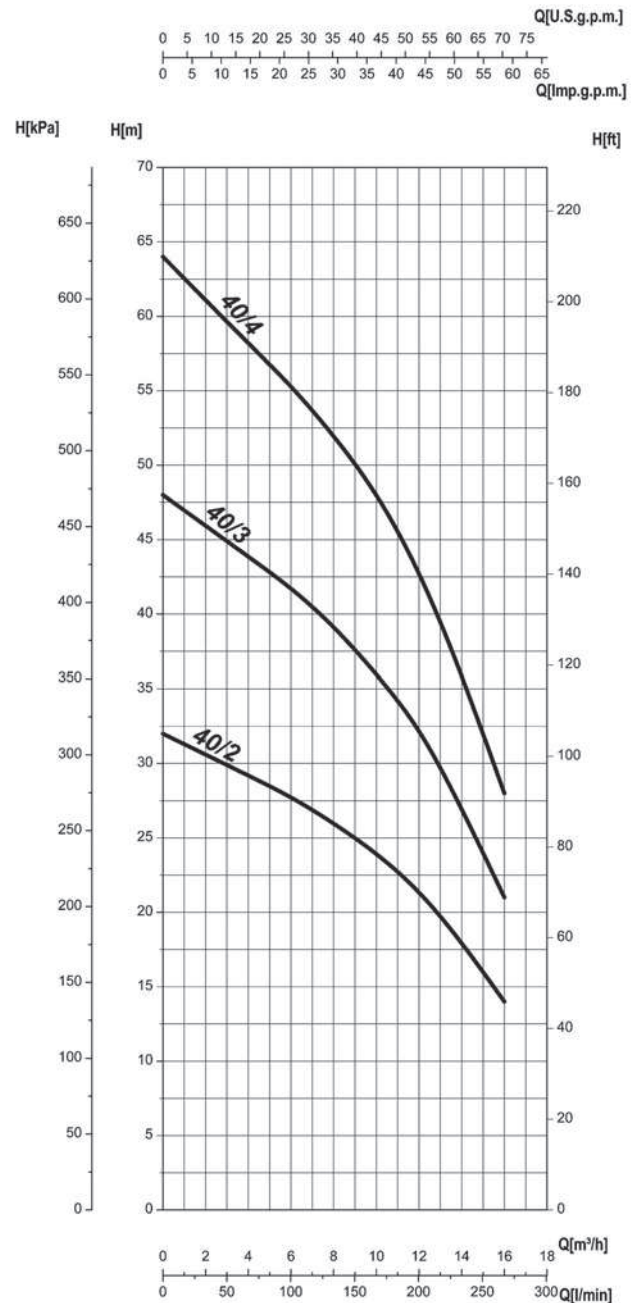

• CARATTERISTICHE IDRAULICHE • HYDRAULIC FEATURES • CARACTERISTICAS HIDRAULICAS • CARACTERISTIQUES HYDRAULIQUES
• HYDRAULISCHE EIGENSCHAPEN • CARACTERÍSTICAS HIDRÁULICAS • ГИДРАВЛИЧЕСКИЕ ХАРАКТЕРИСТИКИ

60P	P ₂		G	U.S.g.p.m.	0	18	26,5	35,5	40	44	48,5	53	57,5	62	66	70,5
				m³/h	0	4	6	8	9	10	11	12	13	14	15	16
	60 Hz	kW		HP	l/min	0	67	100	133	150	167	183	200	217	233	250
40/2	1,1	1,5	H (m)		32	29	28	26	25,0	24	23	21,5	20	18	16	14
40/3	1,5	2			48	43,5	42	39	37,5	36	34,5	32,5	30	27	24	21
40/4	2,2	3			64	58	56	52	50	48	46	43	40	36	32	28

UNI EN ISO 9906-A