



RG 40-16 4P

1750 [rpm]
1 Stage

Curve N.




T-1980

Max. diameter 169 [mm]	Min. diameter 130 [mm]	Maxspeed 1999 [rpm]	Suction Ø 65 [mm]	Discharge Ø 40 [mm]
----------------------------------	----------------------------------	-------------------------------	-----------------------------	-------------------------------

Density 1 and viscosity 1 cSt

Replace any previous edition

HD2 : HEAVY DUTY BEARING HOUSING
TYPE 2 (NJ305 + 2x7305)
HD1 : HEAVY DUTY BEARING HOUSING
TYPE 1 (6305 + 3305)
STD : STANDARD BEARING HOUSING
(2x6305)

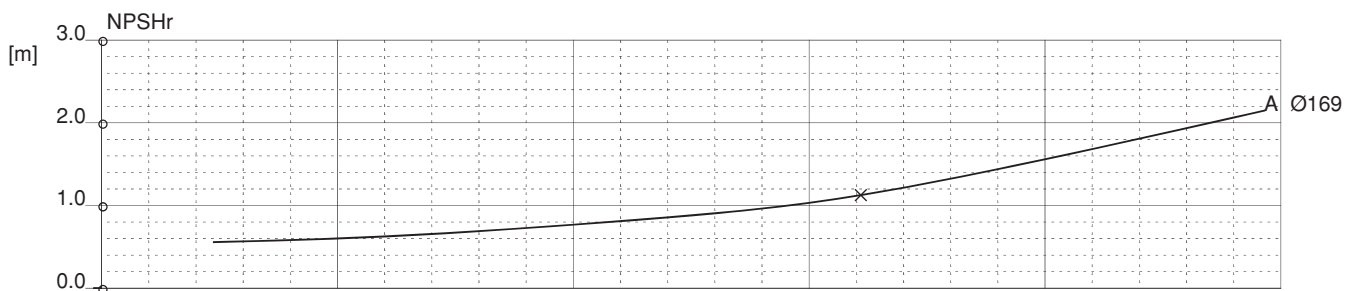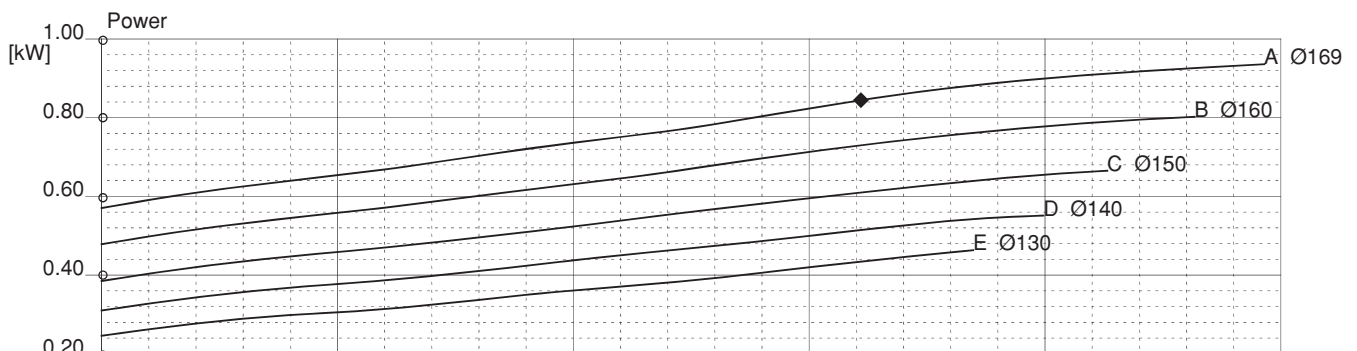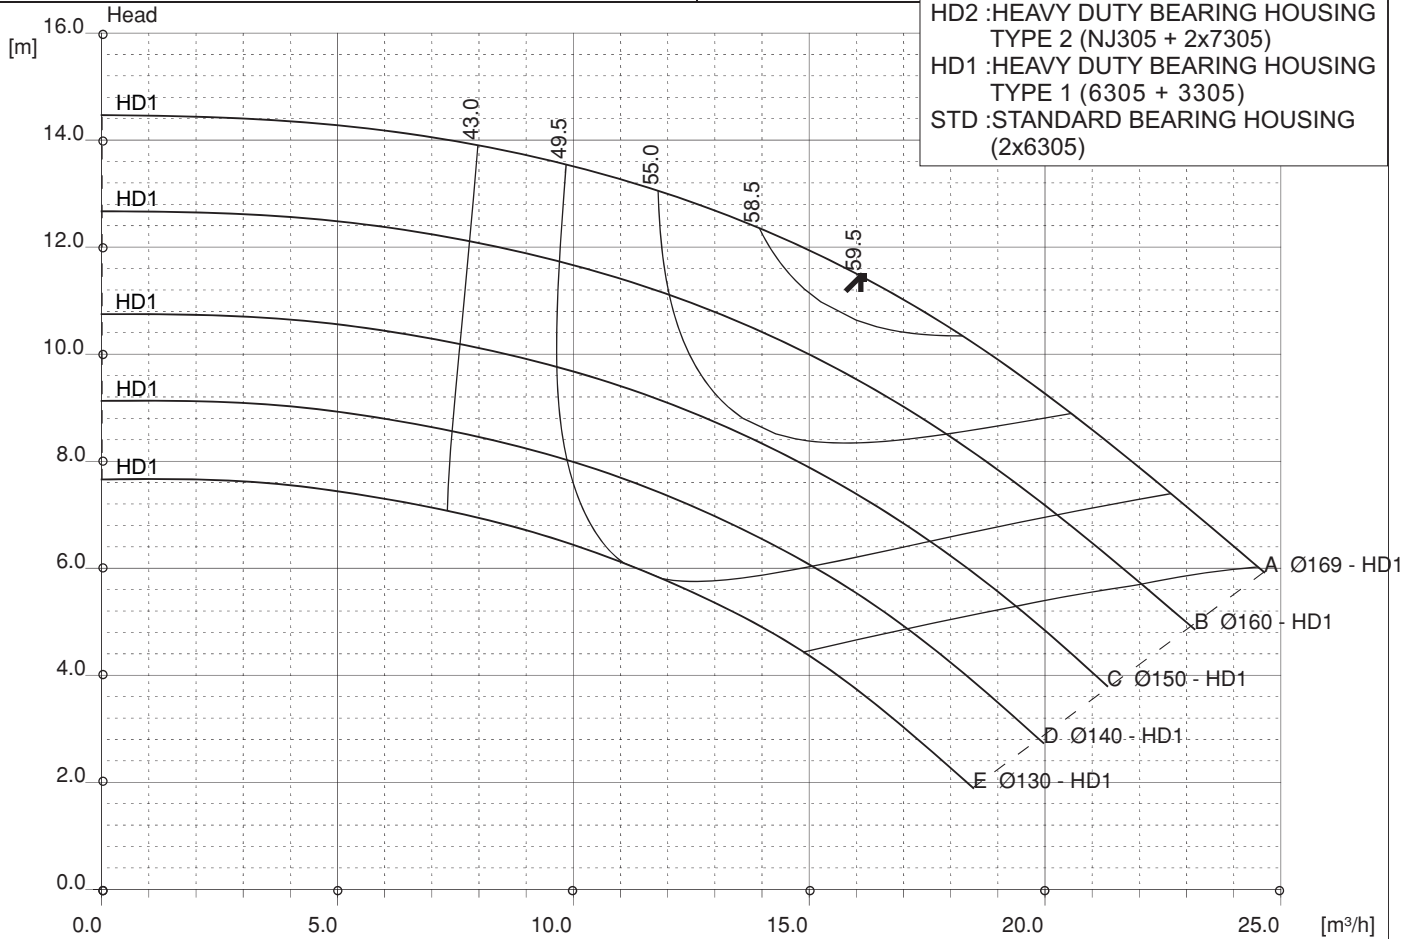

Comments

Diffuser	Impeller	NS 19	SSS 107	Author	Date Feb 4, 2011	Revision
----------	----------	-----------------	-------------------	--------	----------------------------	----------