



RG 50-16 4P

1750 [rpm]

1 Stage

Curve N.

T-1982

Max. diameter
169 [mm]

Min. diameter
130 [mm]

Maxspeed
1999 [rpm]




Suction Ø
80 [mm]

Discharge Ø
50 [mm]

Density 1 and viscosity 1 cSt

Replace any previous edition

HD2 : HEAVY DUTY BEARING HOUSING
TYPE 2 (NJ305 + 2x7305)
HD1 : HEAVY DUTY BEARING HOUSING
TYPE 1 (6305 + 3305)
STD : STANDARD BEARING HOUSING
(2x6305)

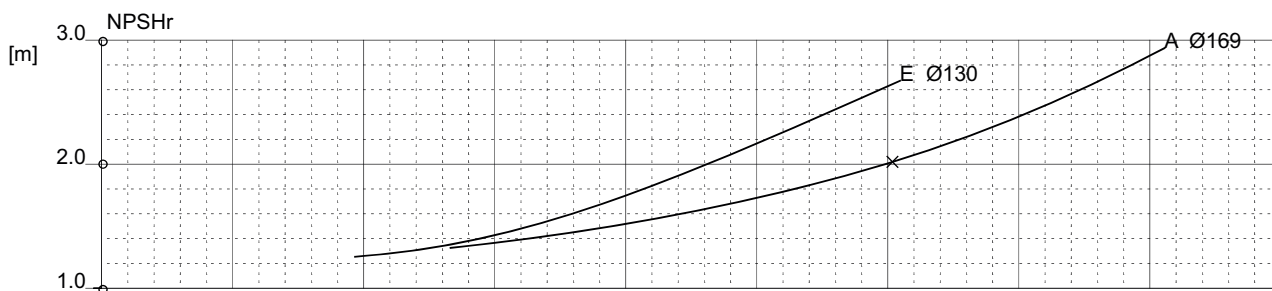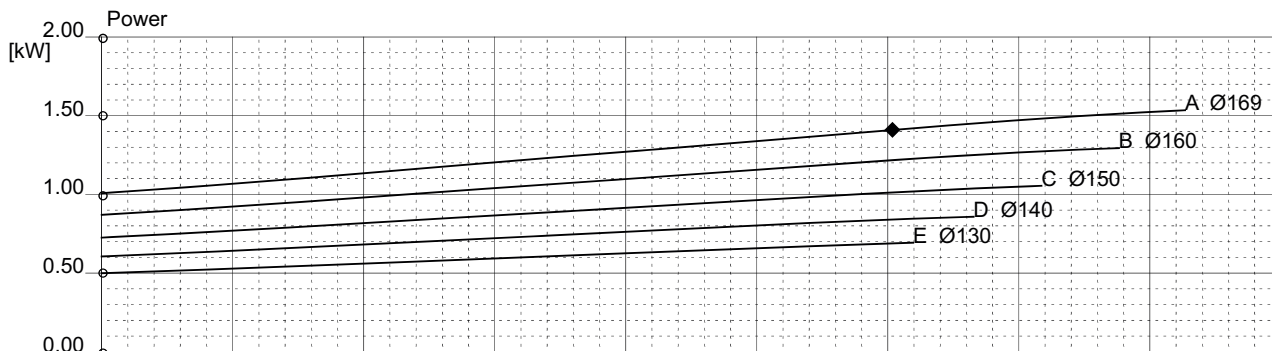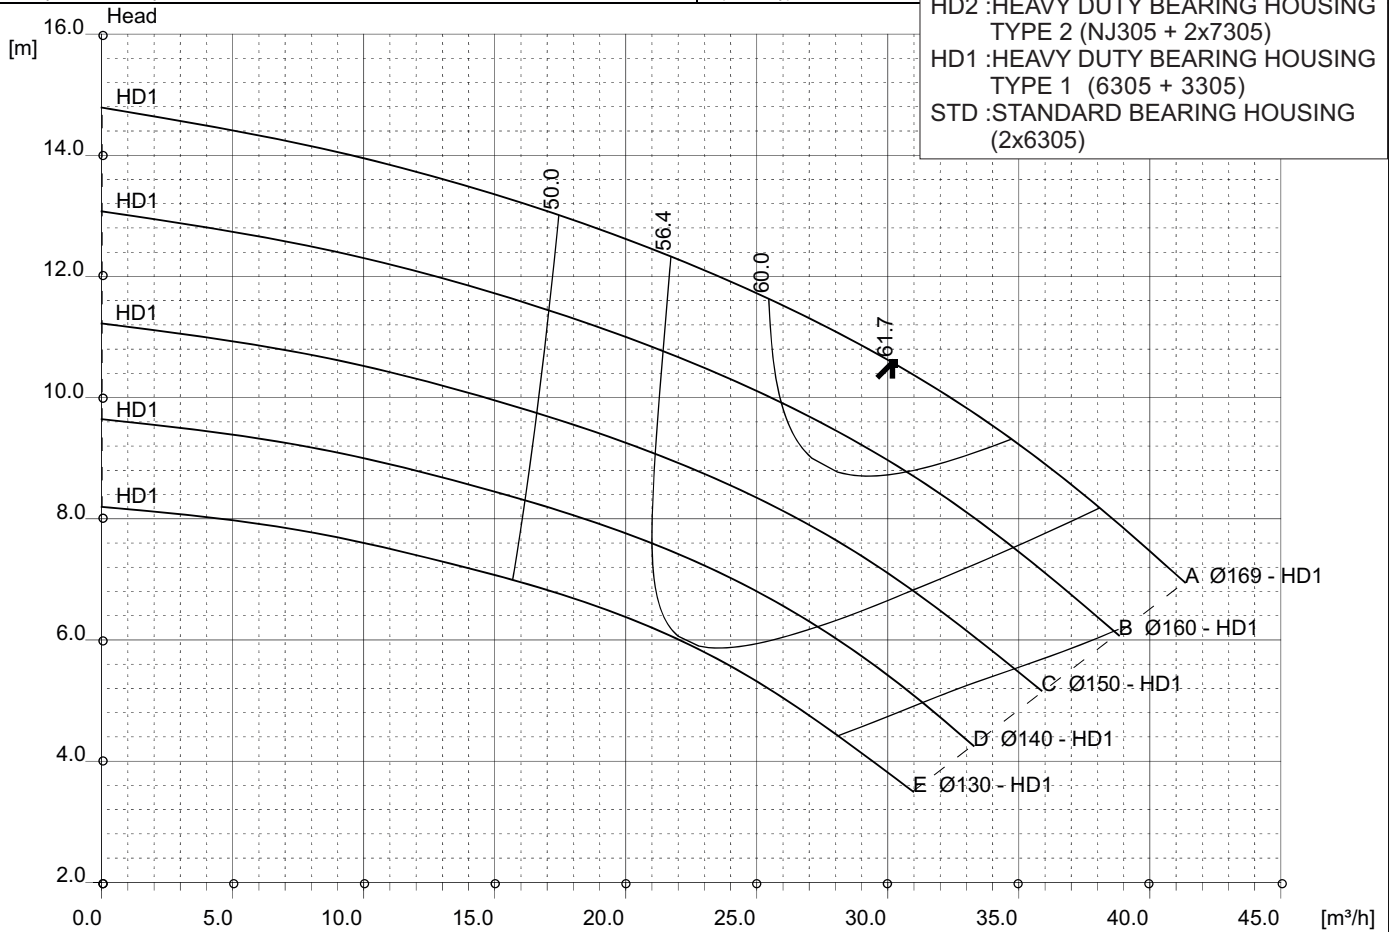

Comments

Diffuser	Impeller	NS 27	SSS 95	Author	Date Feb 7, 2011	Revision
----------	----------	-----------------	------------------	--------	----------------------------	----------