



# RG 50-20 2P

3500 [rpm]

1 Stage

Curve N.

T-1975

Max. diameter  
209 [mm]

Min. diameter  
170 [mm]

Maxspeed  
3500 [rpm]




Suction Ø  
80 [mm]

Discharge Ø  
50 [mm]

Density 1 and viscosity 1 cSt

Replace any previous edition

HD2 : HEAVY DUTY BEARING HOUSING  
TYPE 2 (NJ305 + 2x7305)  
HD1 : HEAVY DUTY BEARING HOUSING  
TYPE 1 (6305 + 3305)  
STD : STANDARD BEARING HOUSING  
(2x6305)

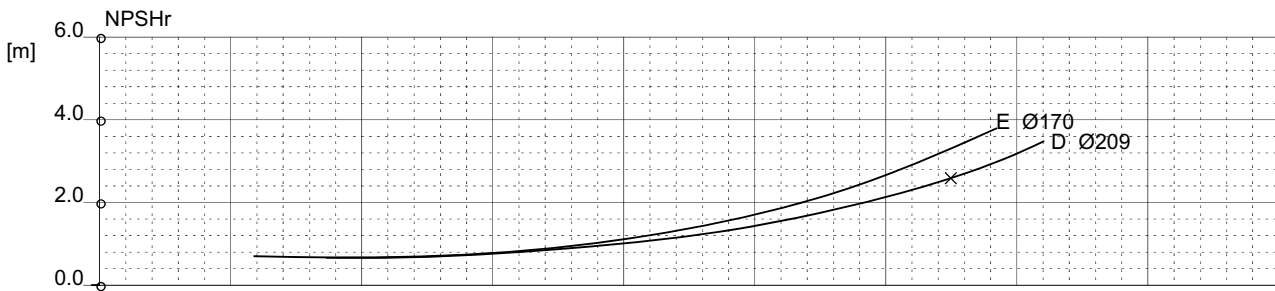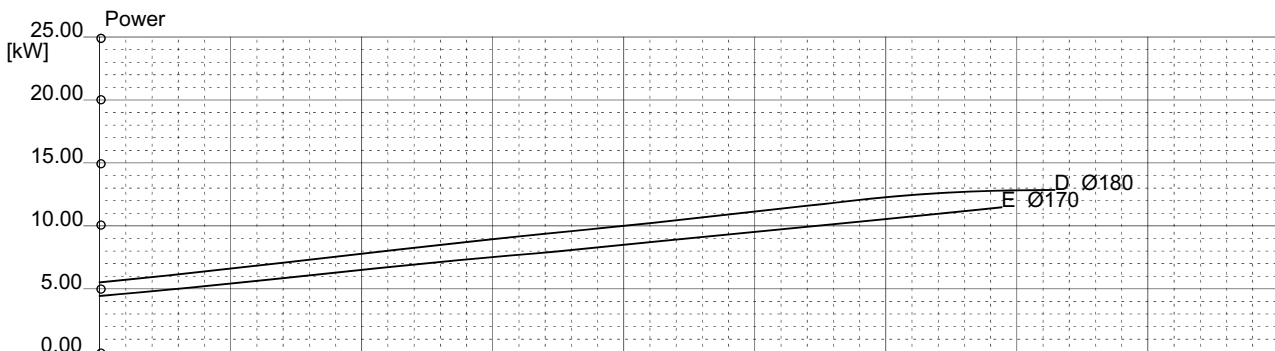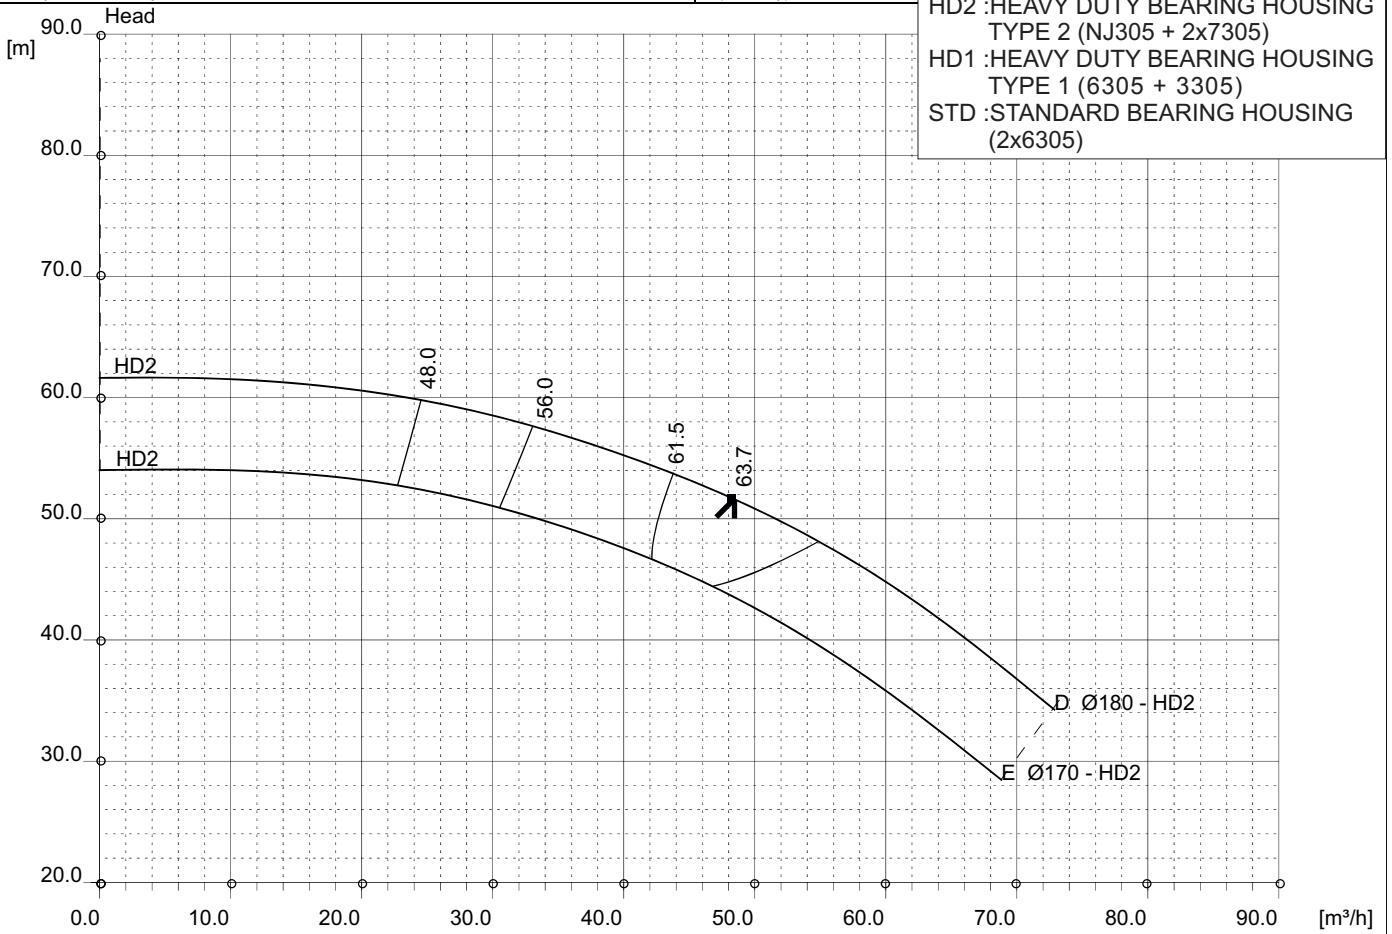

Comments

Diffuser	Impeller	NS 19	SSS 230	Author	Date Feb 7, 2011	Revision
----------	----------	----------	------------	--------	---------------------	----------